STEREO INTEGRATED AMPLIFIER

A-57/77

SERVICE MANUAL

KENWOOD

©1993-6 PRINTED IN JAPAN
B51-4734-00 (S) 2365

[A-57]

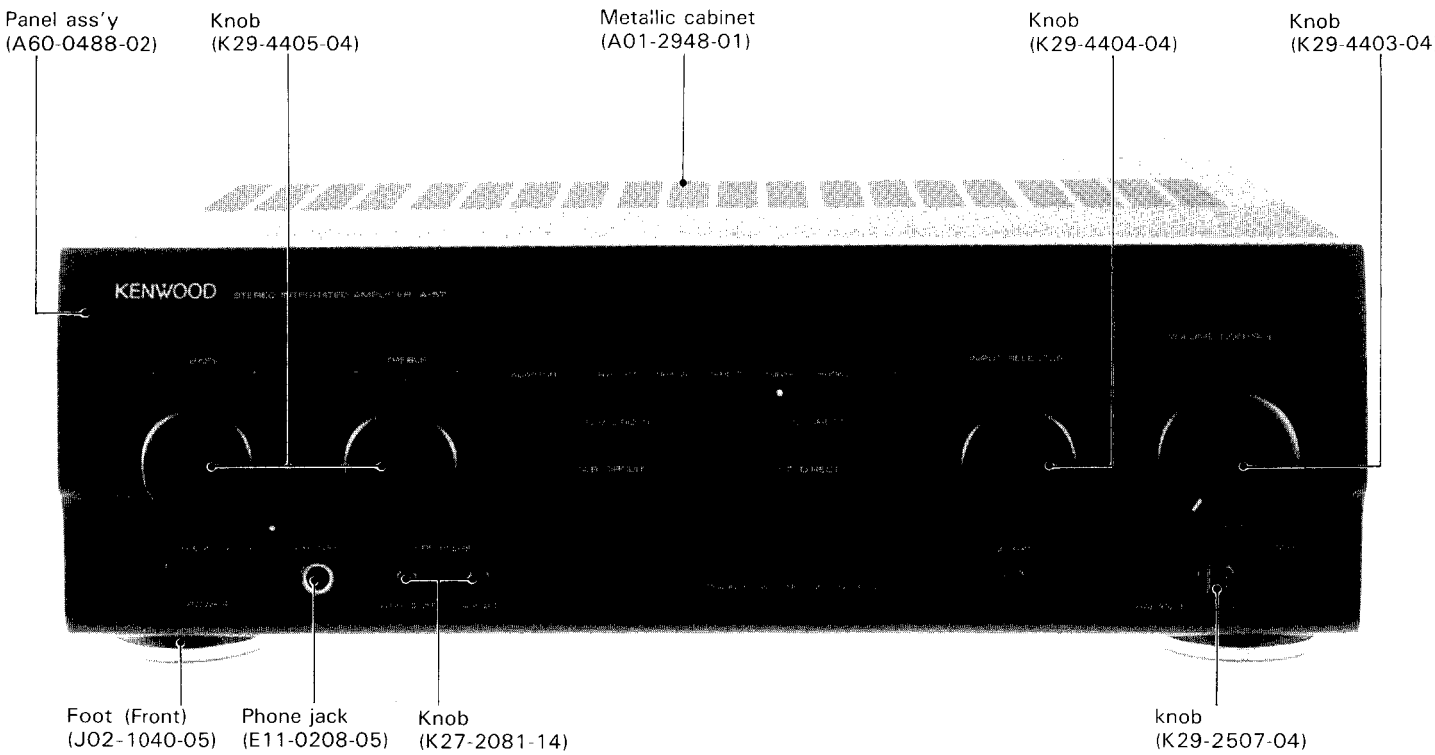

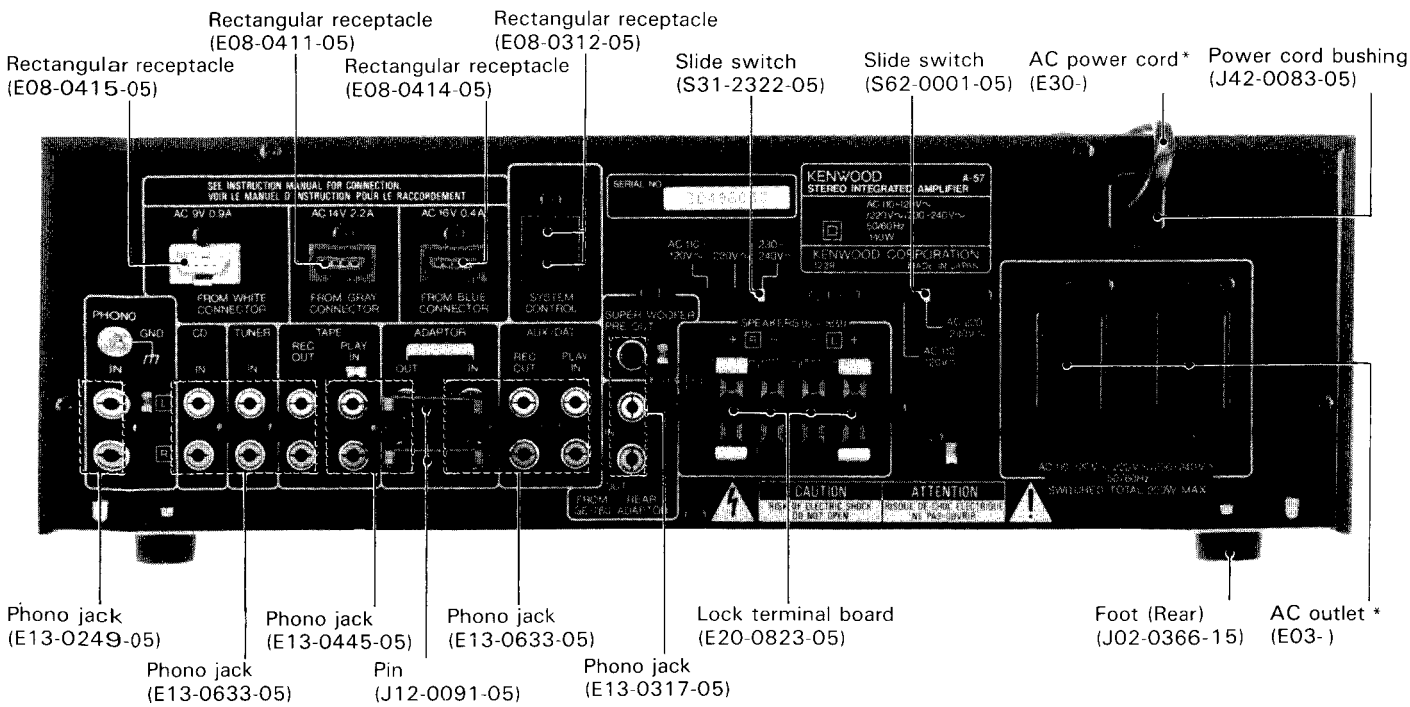

*Refer to parts list on page 26.

A-57/77

CONTENTS

REMOTE CONTROL OPERATION 3
CIRCUIT DESCRIPTION 5
WIRING DIAGRAM 9
PC BOARD (Component side view) 11
SCHEMATIC DIAGRAM 17
EXPLODED VIEW(UNIT) 25
PARTS LIST 26
SPECIFICATION ..... BACK COVER

[A-77]

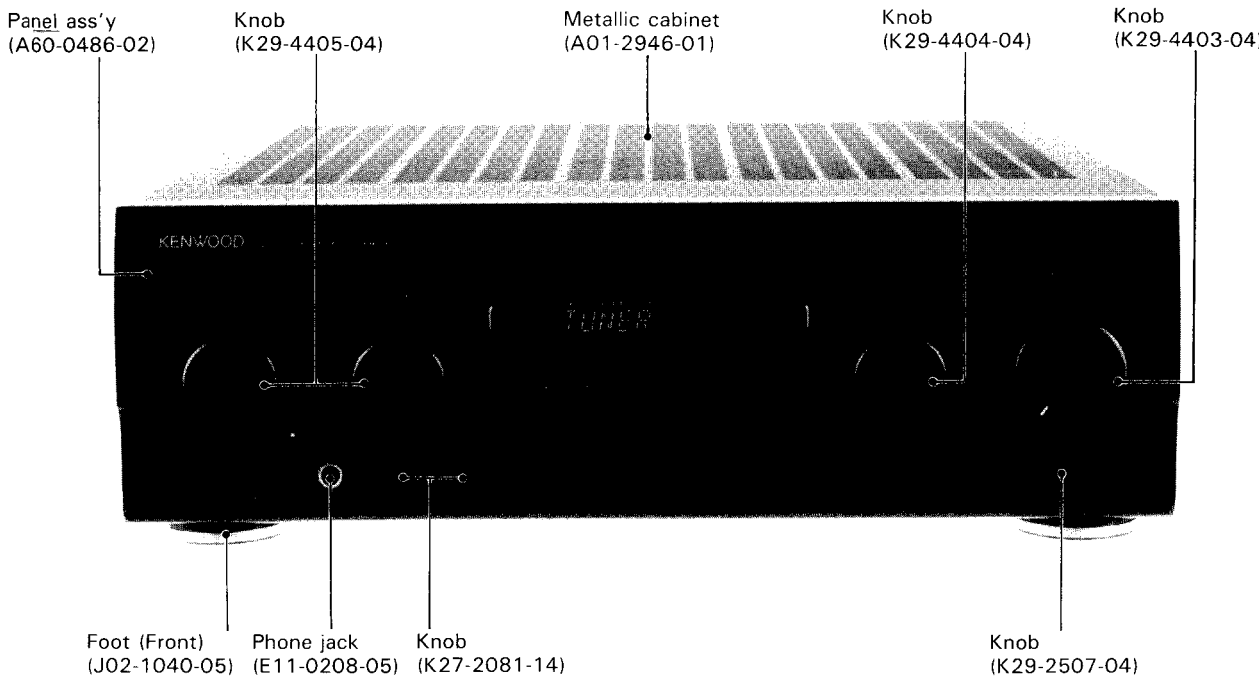

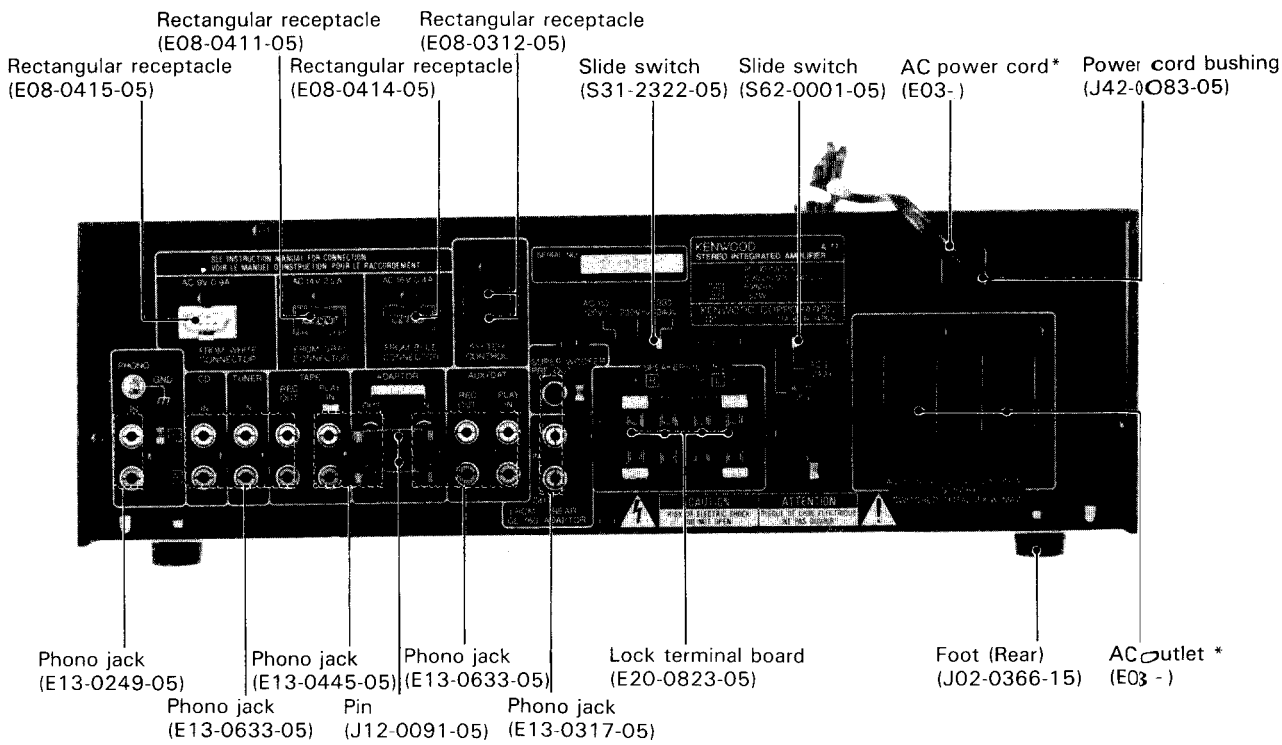

*Refer to parts list on page 26.

REMOTE CONTROL OPERATION

RC-57(X94-1001-41):JAPAN MADE
(X94-1011-41):SINGAPORE MADE
BATTERY COVER(A09-0115-13):JAPAN MADE
(A09-0126-03):SINGAPORE MADE

SLEEP key

Tuner operation keys

POWER key
Switches the system power supply ON/OFF.

CD player operation keys

Numerical keys
These keys function as numerical keys when the input selector is at CD or Tuner.

Cassette deck operation keys

Turntable operation keys
Read the instruction manual of the turntable.

AUX/DAT key
Switches the audio equipment (connected to the AUX/DAT jacks on the amplifier rear panel) ON/OFF.

MUTE key
Reduces the sound volume temporarily.

Graphic Equalizer operation keys
See the instruction manual of GE-760 /GE-560 optional.

VOLUME CONTROL keys

GE-560

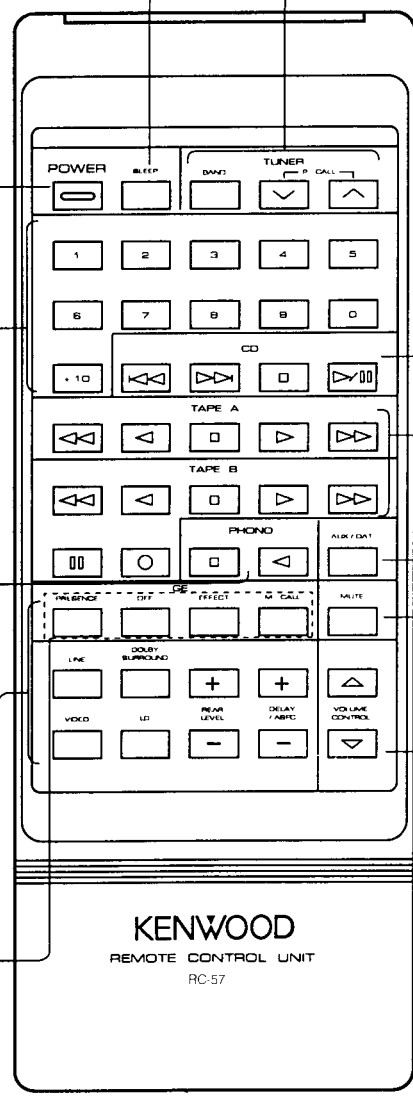

REMOTE CONTROL OPERATION

RC-77(X94-1001-41):JAPAN MADE
(X94-1011-41):SINGAPORE MADE

BATTERY COVER(A09-0115-13):JAPAN MADE
(A09-0126-03):SINGAPORE MADE

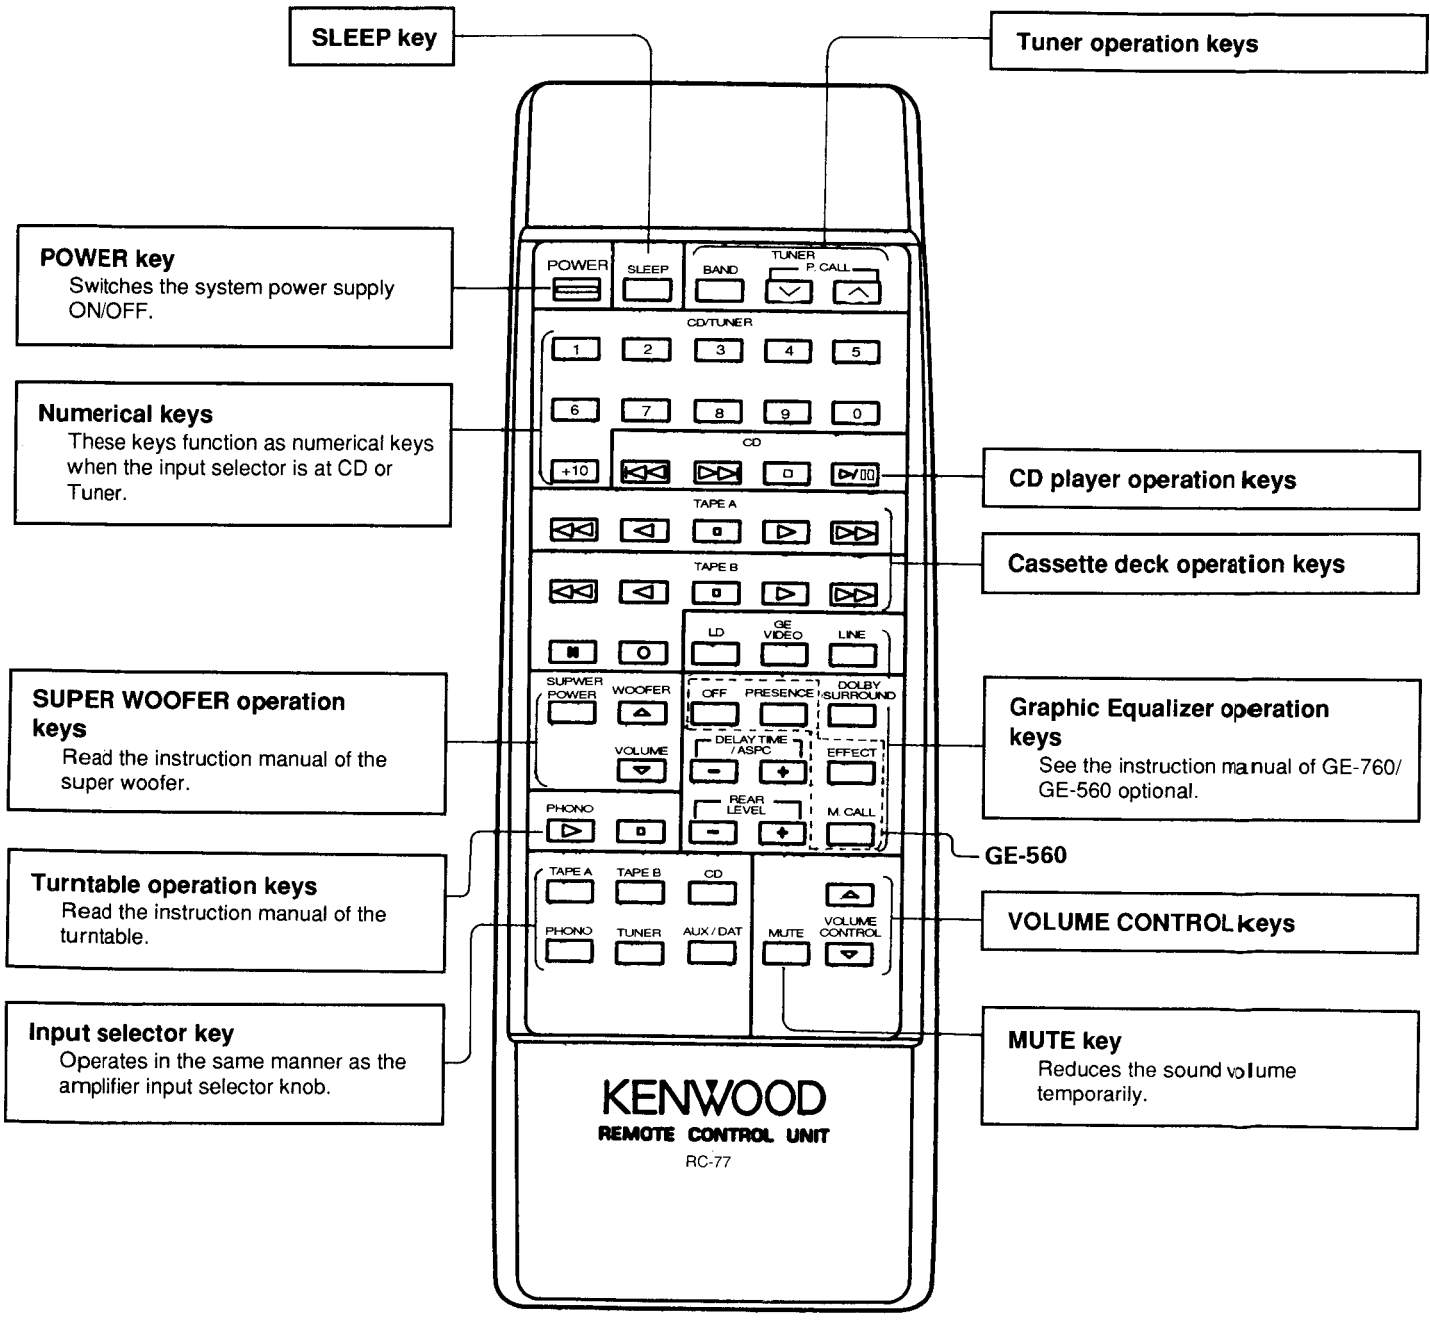

KA-57 and KA-77 is same of the operation manual.

B60-1302-00	ENGLISH	ET	B60-1307-00	SPANISH	E
B60-1303-00	FRENCH	E	B60-1308-00	ENGLISH	MX
B60-1304-00	GERMAN	E	B60-1309-00	SPANISH	M
B60-1305-00	DUTCH	E	B60-1310-00	CHINESE	M
B60-1306-00	ITALIAN	E			

CIRCUIT DESCRIPTION

Pin Description (A-57)

IC1 μPD75004CU-147

Pin No.	Pin Name	I/O	Name	Description
1	XT1	I		GND
2	XT2			Open
3	$\overline{\text{RESET}}$	I		Reset input
4	X1	I		Clock OSC
5	X2			Clock OSC
6	P33	I	P ROT L	Rotary encoder L
7	P32	I	P ROT R	Rotary encoder R
8	P31	I/O	S DATA	Serial "DATA"
9	P30	I/O	S BUSY	Serial "BUSY"
10	P81	I	Unused	GND
11	P80	O	LOUD	NBC loudness ON/OFF port
12	P03	I	K POWER	Key power
13	P02	I	K NBC	Key NB circuit
14	P01	I	K CD DIR	Key CD direct
15	P00	I	K CD REC	Key CD REC
16	P13	I	SP ON/OFF	SP ON/OFF selector
17	P12	I	PROTECT	PROTECTION IN
18	P11	I	SP A/B	Speaker relay A/B selector
19	INT0	I	PEMIN	Remote control input
20	NC			+5V
21	V_{DD}			+5V
22	P23	O	T CLK	Selector IC CLOCK
23	P22	O	T DT	Selector IC DATA
24	P21	O	T ST	Selector IC STROVE
25	P20	O	POWER	Power ON/OFF
26	P73	O	SP B	Speaker relay B
27	P72	O	SP A	Speaker relay A
28	P71	O	$\overline{\text{MUTE}}$	Mute
29	P70	O	V DOWN	Volume DOWN
30	P63	O	V UP	Volume UP
31	P62	O	V LED	Volume LED
32	P61	O	L NBC	NB circuit LED
33	P60	O	L CD REC	CD REC LED
34	P53	O	$\overline{\text{L CD DIR}}$	CD DIRECT LED
35	P52	O	$\overline{\text{L ADUPTER}}$	Adapter LED
36	P51	O	$\overline{\text{L CD}}$	CD LED
37	P50	O	$\overline{\text{L AUX}}$	AUX/DAT LED
38	P43	O	$\overline{\text{L TAPE B}}$	TAPE B LED
39	P42	O	$\overline{\text{L TAPE A}}$	TAPE A LED
40	P41	O	$\overline{\text{L TUNER}}$	TUNER LED
41	P40	O	$\overline{\text{L PHONO}}$	PHONO LED
42	Vss		Vss	GND

CIRCUIT DESCRIPTION

Pin Description (A-77)

IC μPD75268CW-044

Pin No.	Pin Name	I/O	Name	Description
1	S3	O	SEG k	FL Segment k
2	S2	O	SEG f	FL Segment f
3	S1	O	SEG g	FL Segment g
4	S0	O	SEG h	FL Segment h
5	P00	I	K POWER	Key power
6	P01	I	K NBC	KEY NB circuit
7	P02	I	K CD DIR	KEY CD direct
8	P03	I	K CD REC	KEY CD REC
9	INT0	I	REMIN	Remote control input
10	P11	I	SP A/B	Speaker relay A/B selector
11	P12	I	PROTECT	PROTECTION IN
12	P13	I	SP ON/OFF	Speaker relay ON/OFF selector
13	P20	O	POWER	Power ON/OFF
14	P21	O	SP A	Speaker relay A
15	P22	O	SP B	Speaker relay B
16	P23	O	$\overline{\text{MUTE}}$	Mute
17	P30	I/O	S BUSY	Serial "BUSY"
18	P31	I/O	S DATA	Serial "DATA"
19	P32	I	P ROT R	Rotaly encorder R
20	P33	I	P ROT L	Rotaly encorder L
21	P60	I	Unused	GND
22	P61	I	Unused	GND
23	P62	I	Unused	GND
24	P63	I	Unused	GND
25	P40	O	Unused	Open
26	P41	O	T ST	Selector IC "STROVE"
27	P42	O	T DT	Selector IC "DATA"
28	P43	O	T CLK	Selector IC "CLOCK"
29	IC			
30	X1			Clock OSC
31	X2			Clock OSC
32	GND			GND
33	XT1			GND
34	XT2			NC
35	P50	O	LOUD	NBC loudness ON/OFF port
36	P51	O	V DOWN	Volume DOWN
37	P52	O	V UP	Volume UP
38	P53	O	V LED	Volume LED
39	RESET		$\overline{\text{RESET}}$	Reset
40	T0	O	Unused	Open
41	T1	O	Unused	Open
42	T2	O	G8	FL glid 8

CIRCUIT DESCRIPTION

Pin Description (A-77)

Pin No.	Pin Name	I/O	Name	Description
43	T3	O	G7	FL glid 7
44	T4	O	G6	FL glid 6
45	T5	O	G5	FL glid 5
46	T6	O	G4	FL glid 4
47	T7	O	G3	FL glid 3
48	T8	O	G2	FL glid 2
49	T9	O	G1	FL glid 1
50	T10	O	SEG d	FL segment d
51	T11	O	SEG e	FL segment e
52	T12	O	SEG m	FL segment m
53	T13	O	SEG 1	FL segment 1
54	T14	O	T14/S11	NC
55	T15	O	T15/S10	NC
56	V load			FL –30V
57	V pre			FL –5V
58	S9	O	SEG n	FL segment n
59	S8	O	SEG c	FL segment c
60	S7	O	SEG a	FL segment a
61	S6	O	SEG b	FL segment b
62	S5	O	SEG j	FL segment j
63	S4	O	SEG i	FL segment i
64	V_{DD}		V_{DD}	+5V

CIRCUIT DESCRIPTION

TEST MODE

1. INITIAL STATE

(1) The initial state after turning the POWER ON is shown in the followings.

POSITION	=	TUNER
CD DIRECT	=	OFF
CD REC	=	OFF
MUTE	=	OFF
(* MUTE	=	ON There is no sound)
MUTE	=	OFF There is sound)
NB CIRCUIT	=	OFF

The VOLUME LED flickers during 4 seconds after turning the POWER ON, and after that it lights up.

(2) When the operation is in the initial setting.
Plug the AC cord in the power outlet while pushing the POWER key.

2. TEST MODE

(1) When the operation is in the TEST MODE...

Plug the AC cord in the power outlet while pushing the CD DIR key.
◇ All indications light up.

(2) To check the MOTOR VOL...

The following operations are carried out successively when the NBC key is pushed once during the TEST MODE.
◇ VOL UP during 16 msec
◇ VOL DOWN during 16 msec
◇ VOL STOP

(3) To reset all indications that are lit up...

Push the CD REC key.
◇ The LED are switched from the "all lit up" state to the ordinary operation.

(4) To release the TEST MODE...

Unplug the AC cord.
The storage of the microcomputer is cleared at the same time.

WIRING DIAGRAM

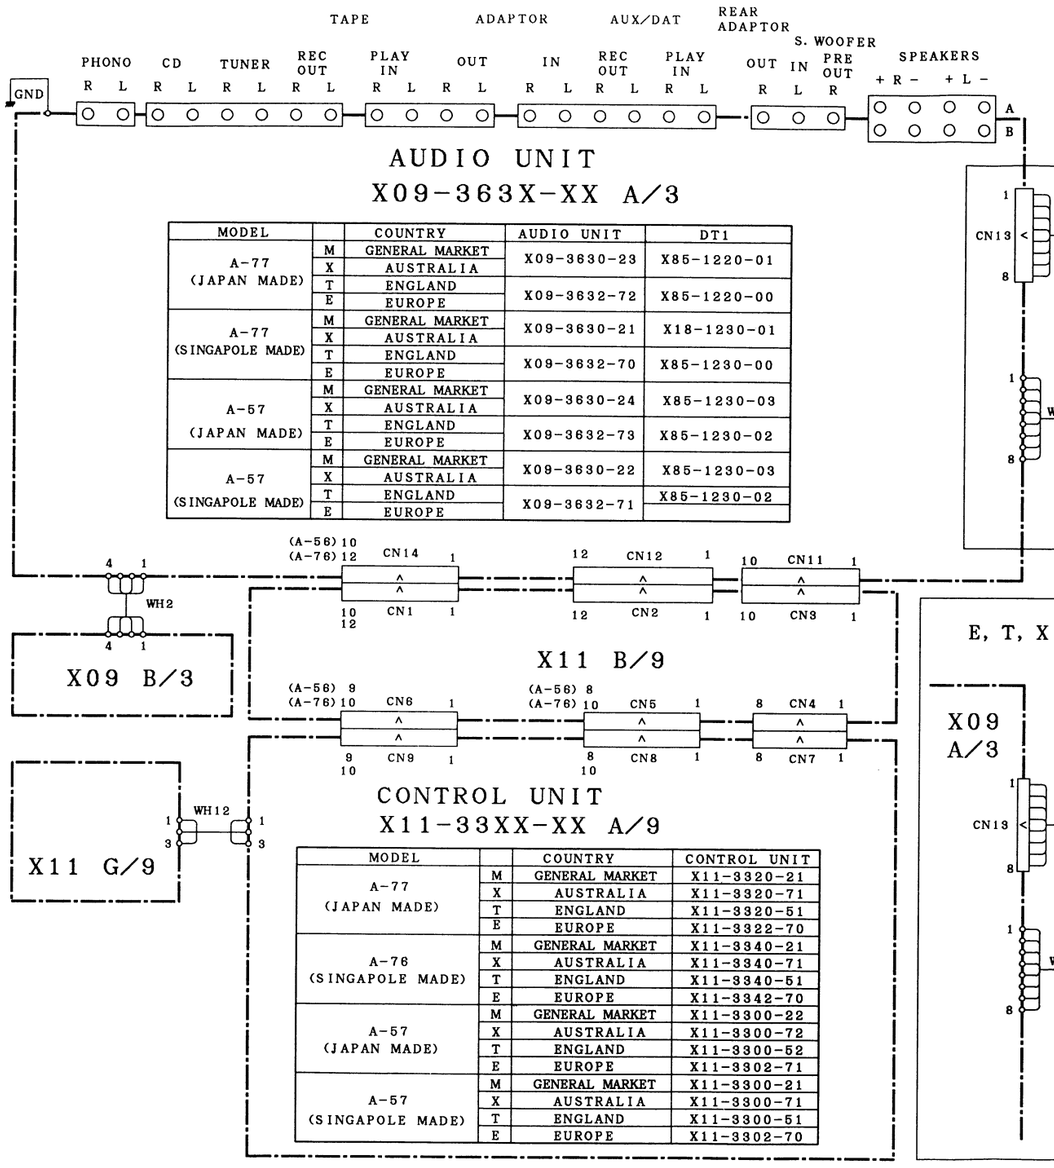

MODEL		COUNTRY	AUDIO UNIT	DT1
A-77 (JAPAN MADE)	M	GENERAL MARKET	X09-3630-23	X85-1220-01
	X	AUSTRALIA		
	T	ENGLAND	X09-3632-72	X85-1220-00
	E	EUROPE		
A-77 (SINGAPOLE MADE)	M	GENERAL MARKET	X09-3630-21	X18-1230-01
	X	AUSTRALIA		
	T	ENGLAND	X09-3632-70	X85-1230-00
	E	EUROPE		
A-57 (JAPAN MADE)	M	GENERAL MARKET	X09-3630-24	X85-1230-03
	X	AUSTRALIA		
	T	ENGLAND	X09-3632-73	X85-1230-02
	E	EUROPE		
A-57 (SINGAPOLE MADE)	M	GENERAL MARKET	X09-3630-22	X85-1230-03
	X	AUSTRALIA		
	T	ENGLAND	X09-3632-71	X85-1230-02
	E	EUROPE		

MODEL		COUNTRY	CONTROL UNIT
A-77 (JAPAN MADE)	M	GENERAL MARKET	X11-3320-21
	X	AUSTRALIA	X11-3320-71
	T	ENGLAND	X11-3320-51
	E	EUROPE	X11-3322-70
A-76 (SINGAPOLE MADE)	M	GENERAL MARKET	X11-3340-21
	X	AUSTRALIA	X11-3340-71
	T	ENGLAND	X11-3340-51
	E	EUROPE	X11-3342-70
A-57 (JAPAN MADE)	M	GENERAL MARKET	X11-3300-22
	X	AUSTRALIA	X11-3300-72
	T	ENGLAND	X11-3300-52
	E	EUROPE	X11-3302-71
A-57 (SINGAPOLE MADE)	M	GENERAL MARKET	X11-3300-21
	X	AUSTRALIA	X11-3300-71
	T	ENGLAND	X11-3300-51
	E	EUROPE	X11-3302-70

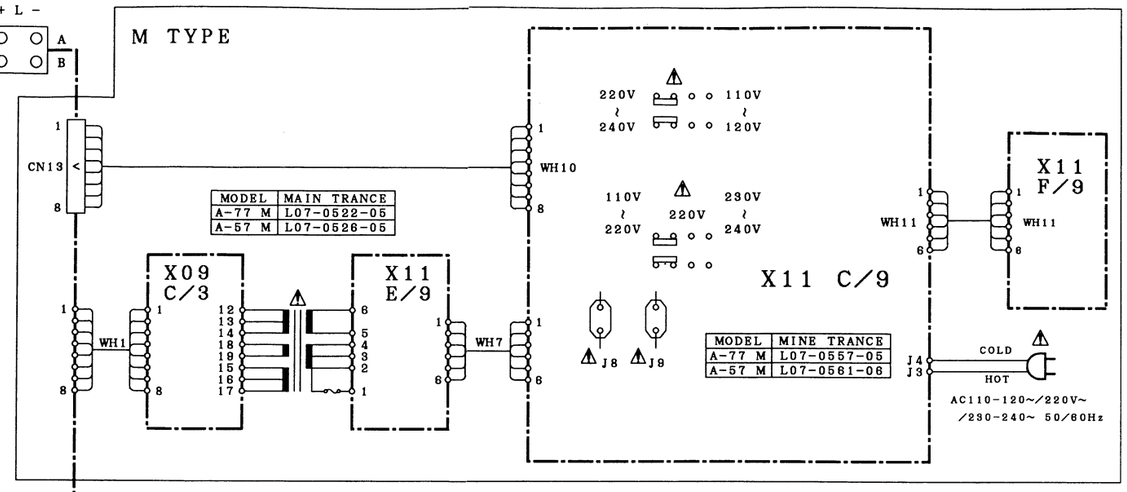

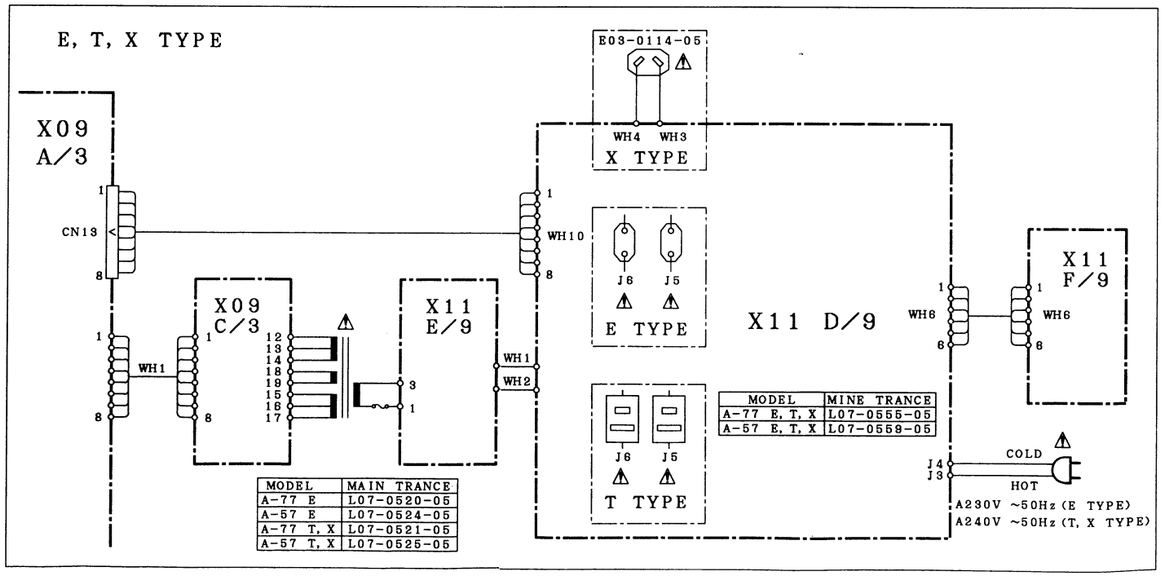

PC BOARD (Component side view) AUDIO UNIT (X09-363X-XX)

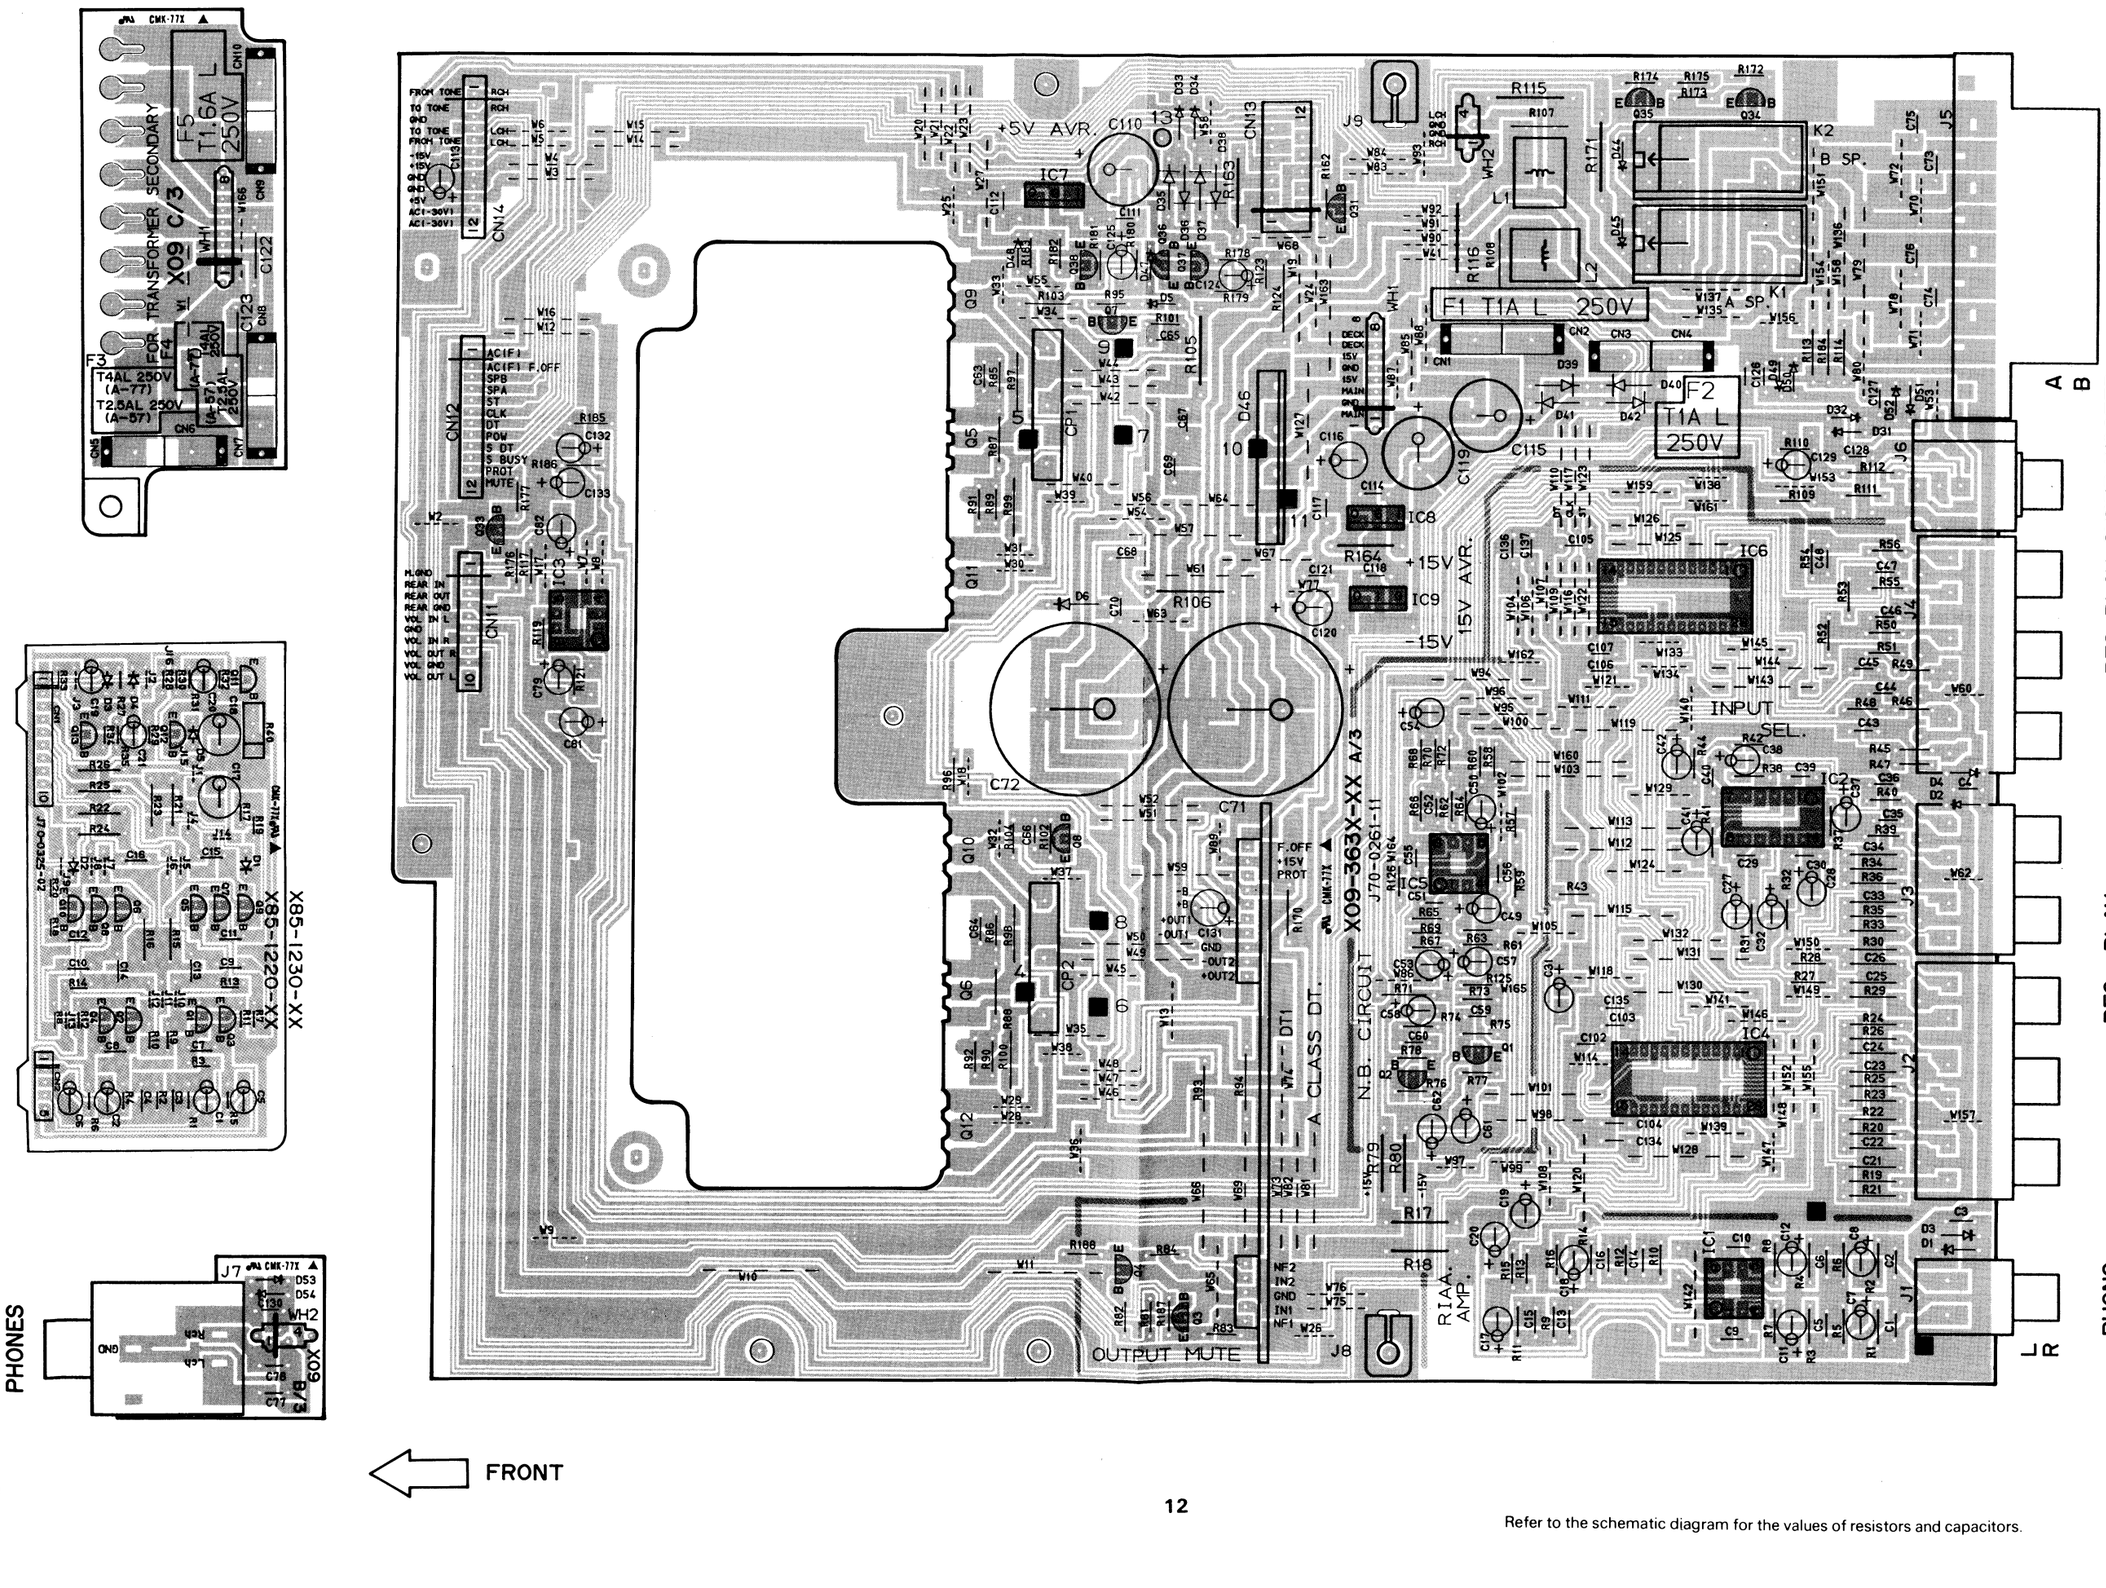

Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (Component side view)

CONTROL UNIT (X11-330X-XX):A-57

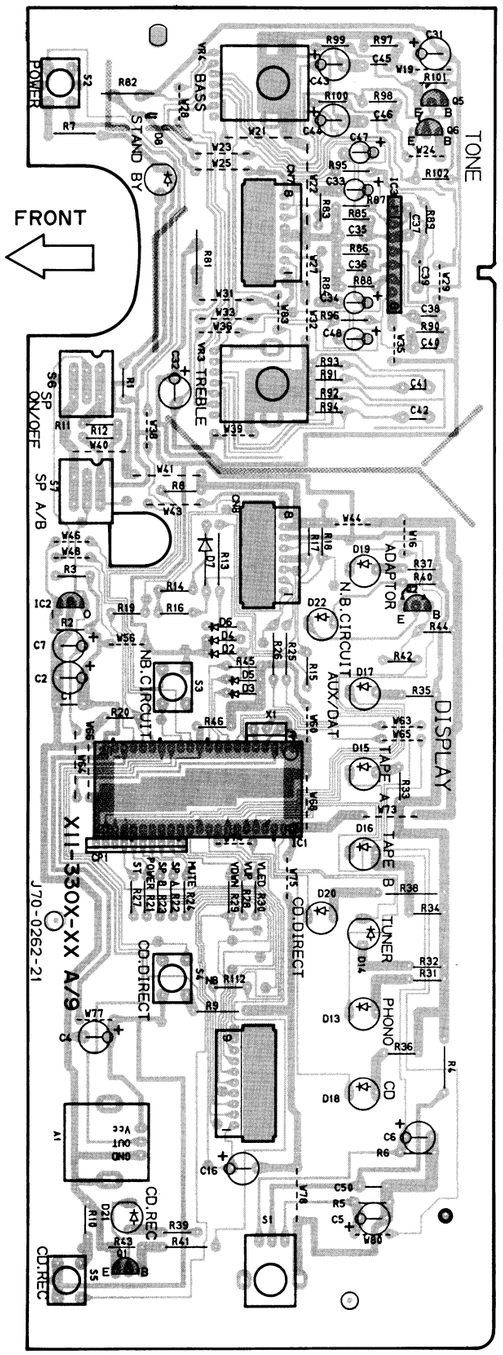

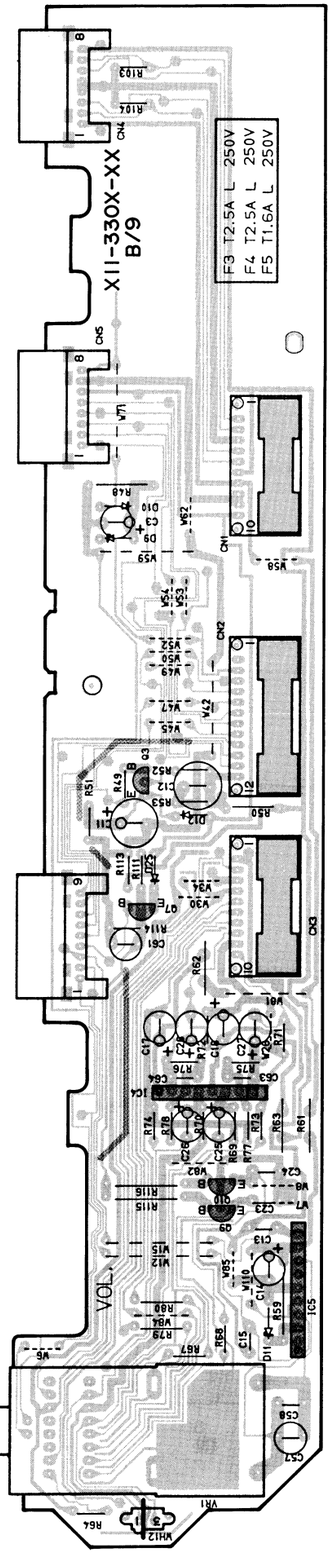

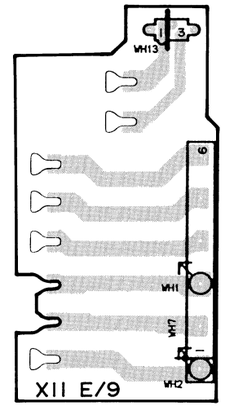



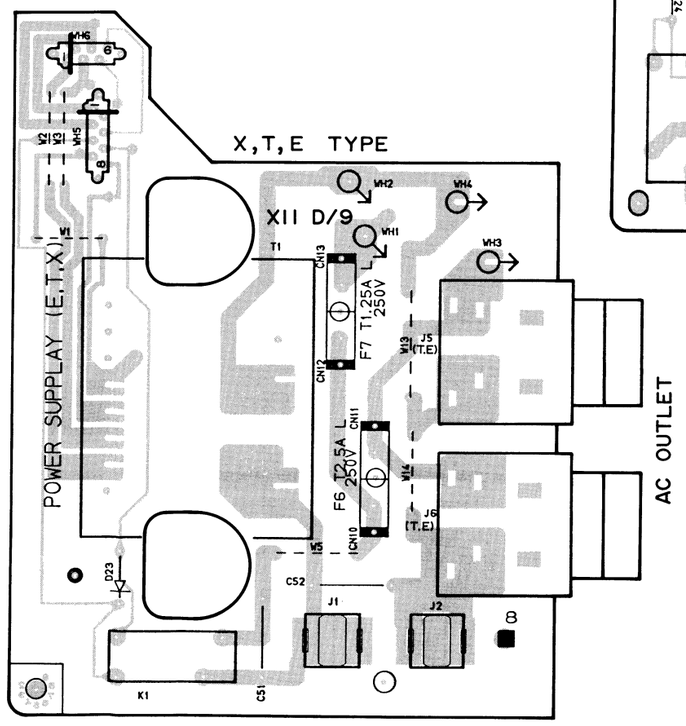

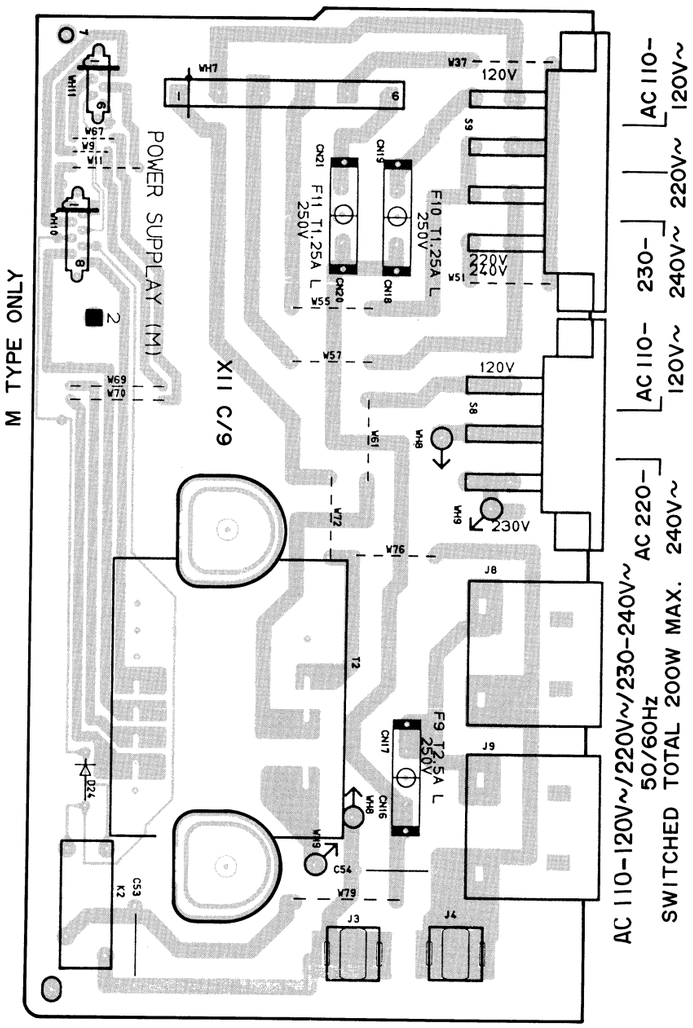

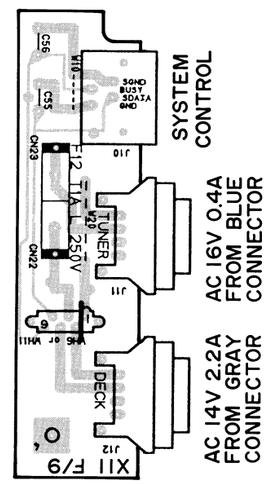





Refer to the schematic diagram for the values of resistors and capacitors.

PC BOARD (Component side view) CONTROL UNIT (X11-332X-XX):A-77

PHONES

VOLUME CONTROL

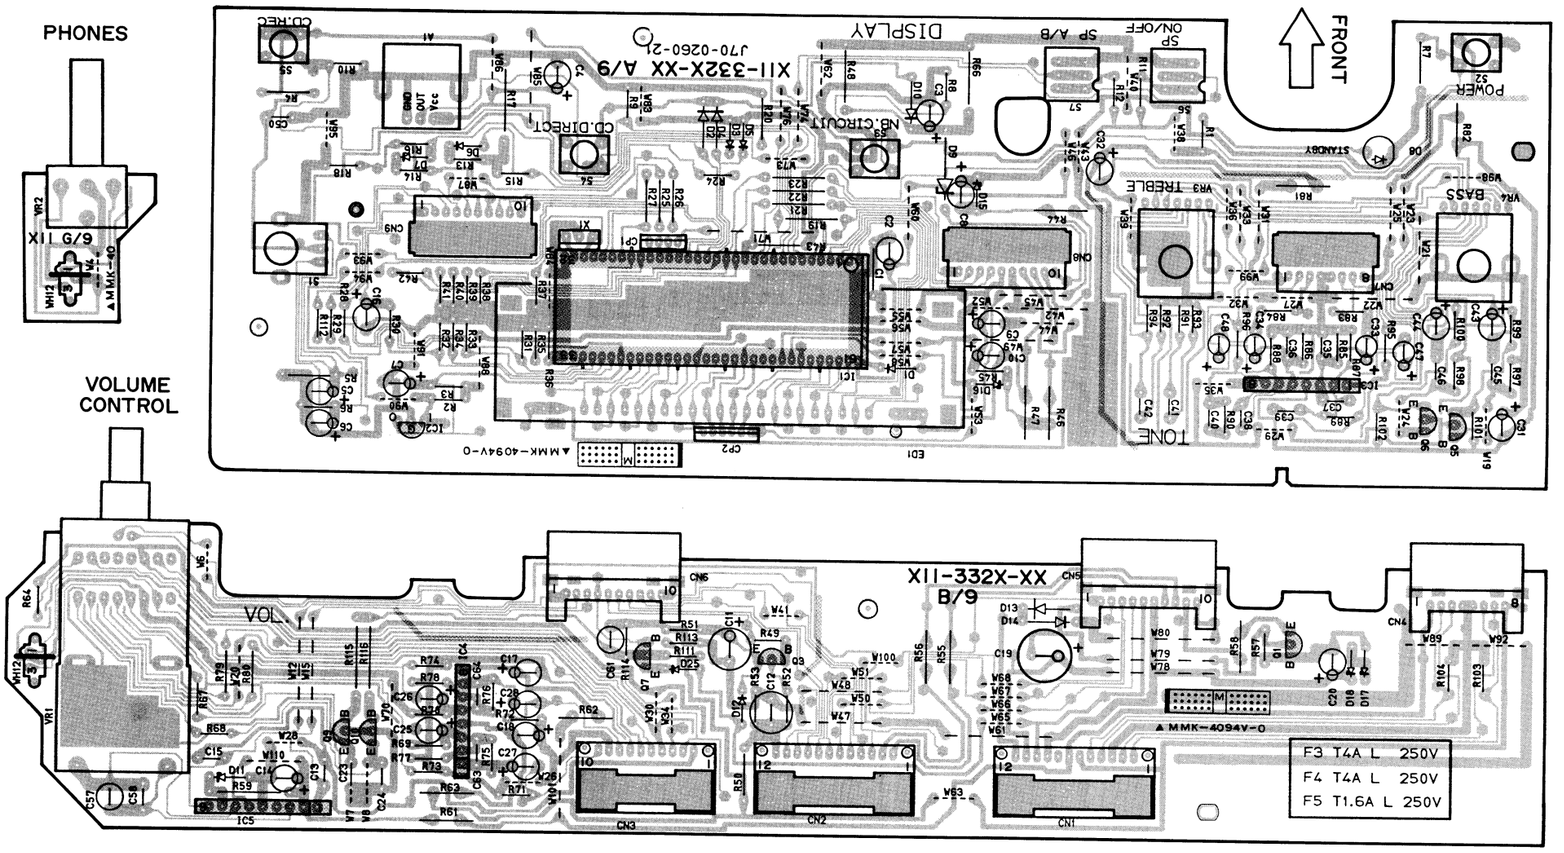

Refer to the schematic diagram for the values of resistors and capacitors.

(X09-363X-XX) (A/3)

H I J K L M N O P Q R

DT1 X85-12XX-XX

(X09-363X-XX)

IC1, 3, 5	:XRA15218-DXor BA15218-DX	Q1, 2, 7, 8	:2SC1845 (F, E)
IC2	:μPC4574C or NJM2058D	Q3, 4, 33	:2SC2878 (A, B)
IC4	:NJU7313L or TC9164N	Q5, 6	:2SC4137 (V, W)
IC6	:NJU7311L or TC9162N	Q8, 10	:2SD2254 (A-77)
IC7	:AN7805F or TA7805S or μPC7805AHF		2SD2340 (A-57)
IC8	:TA7815S or μPC7815AHF	Q11, 12	:2SB1492 (A-77)
IC9	:μPC7915HF		2SB1531 (A-57)
		Q31, 34~37	:2SC2003 (L, K)
		Q38	:2SA933S (Q, R) or 2SA1175 (F, E)

D1~6, 31, 44, 45, 47, 49~5 D35~42

D46

D48

MODEL		COUNTRY		CN13	CN14	D33, 34	C21~26, 33~36, 43~48	C49, 50	C57, 58	C59, 60	C71, 72	R125	R126
A-77 (JAPAN MADE)	M	GENERAL MARKET	0-23	12P	12P	NO	NO	0.047μ	4.7μ35	0.1μ	6800μ63	W165	W164
	X	AUSTRALIA											
	T	ENGLAND	2-72	12P	12P		220P	10μ35	1μ	0.33μ	6800μ63	4.7K	4.7K
	E	EUROPE											
A-77 (SINGAPOLE MADE)	M	GENERAL MARKET	0-21	12P	12P		NO	0.047μ	4.7μ35	0.1μ	6800μ63	W165	W164
	X	AUSTRALIA											
	T	ENGLAND	2-70	12P	12P		220P	10μ35	1μ	0.33μ	6800μ63	4.7K	4.7K
	E	EUROPE											
A-57 (JAPAN MADE)	M	GENERAL MARKET	0-22	8P	10P	YES	NO	0.1μ	4.7μ35	0.1μ	5600μ	2.2K	2.2K
	X	AUSTRALIA											
	T	ENGLAND	2-71	8P	10P		220P	10μ35	1μ	0.33μ	5600μ	2.0K	2.0K
	E	EUROPE											
A-57 (SINGAPOLE MADE)	M	GENERAL MARKET	0-24	8P	10P		NO	0.1μ	4.7μ35	0.1μ	5600μ	2.2K	2.2K
	X	AUSTRALIA											
	T	ENGLAND	2-73	8P	10P		220P	10μ35	1μ	0.33μ	5600μ	2.0K	2.0K
	E	EUROPE											

(X85-12XX-XX)

MODEL			R5. 6	R40
A-77 JAPAN MADE	M	20-01	2.37K	10
	X			
	E	20-00	2.15K	JUMPER
A-77 SINGAPOLE MADE	M	30-01	2.37K	10
	X			
	T	30-00	2.15K	JUMPER
	E			
A-57	M	30-03	2.87K	33
	X			
	T	30-02	2.61K	22
	E			

(X85-122X-XX)

Q1~4, 9, 10. 13 :2SA992 (F. E)
Q5~8 :2SC1845 (F. E)
Q11 :2SC2458 (Y. GR) or 2SC3311A (QR) (J)

Q11 :2SC1740S (QR) or2SC2785 (F. E) (S)
Q12 :UN4212orDTC124ES
D1. 2:1SS133orHSS104
D3 :1SS131orHSS104A

*R40 JUMPER

(M TYPE ONLY)

D24 :1SS131 or HSS104A

(E. T. X TYPE ONLY)

D23 :1SS131 or HSS104A

(X09) (E/9)

L07-0520-05 (A-77 E)
L07-0524-05 (A-57 E)
L07-0521-05 (A-77 T)
L07-0525-05 (A-57 T)
L07-0521-05 (A-77 X)
L07-0525-05 (A-57 X)

E TYPE ONLY

(X09-) (C/3)

L07-0522-05 (A-77)
L07-0526-05 (A-57)

(X09) (E/9)

L07-0557-05 (A-77)
L07-0561-05 (A-56)
L07-0555-05 (A-77)
L07-0559-05 (A-57)

DT1 X85-12XX-XX

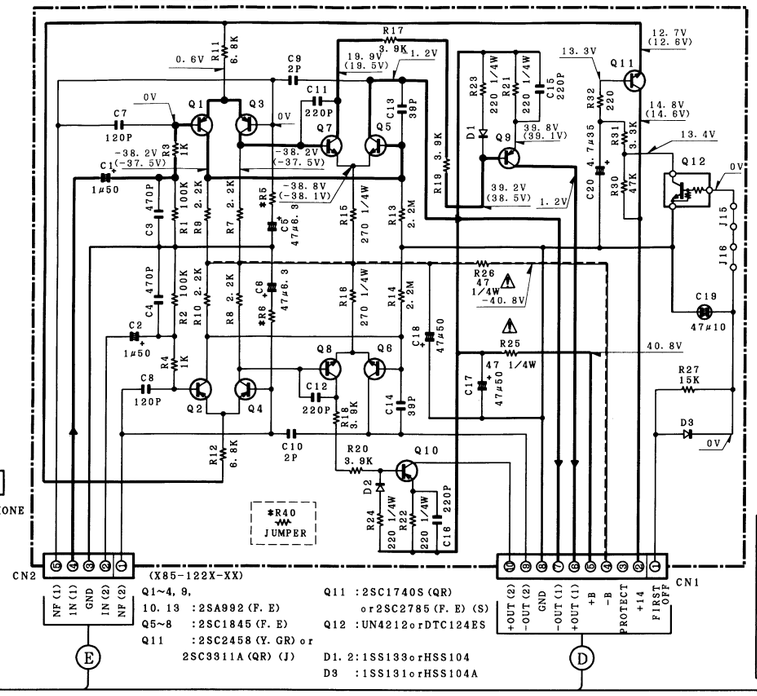

(X09-363X-XX)

IC1, 3, 5	:XRA15218-DXor BA15218-DX	Q1, 2, 7, 8	:2SC1845 (F, E)
IC2	:μPC4574C or NJM2058D	Q3, 4, 33	:2SC2878 (A, B)
IC4	:NJU7313L or TC9164N	Q5, 6	:2SC4137 (V, W)
IC6	:NJU7311L or TC9162N	Q9, 10	:2SD2254 (A-77) 2SD2340 (A-57)
IC7	:AN7805F or TA7805S or μPC7805AHF	Q11, 12	:2SB1492 (A-77) 2SB1531 (A-57)
IC8	:TA7815S or μPC7815AHF	Q31, 34~37	:2SC2003 (L, K)
IC9	:μPC7915HF	Q38	:2SA933S (Q, R) or 2SA1175 (F, E)

D1~6, 31, 32 44, 45, 47, 49~54	:1SS133 or HSS104
D35~42	:S5688B or 1SR139-100
D46	:RBV-602LFA or D5SBA20F03
D48	:RD4. 7ES (B2) or HZS4. 7N (B2)

MODEL		COUNTRY		CN13	CN14	D33, 34	C21~26, 33~36, 43~48	C49, 50	C57, 58	C59, 60	C71, 72	R125	R126	R163	F3, 4	W21~23
A-77 (JAPAN MADE)	M	GENERAL MARKET	0-23	12P	12P	NO	NO	0.047μ	4.7μ35	0.1μ	6800μ63	W165	W164	47 2W	T4A L	YES
	X	AUSTRALIA														
	T	ENGLAND	2-72	12P	12P		220P	10μ35	1μ	0.33μ	6800μ63	4.7K	4.7K			
	E	EUROPE														
A-77 (SINGAPOLE MADE)	M	GENERAL MARKET	0-21	12P	12P		NO	0.047μ	4.7μ35	0.1μ	6800μ63	W165	W164			
	X	AUSTRALIA														
	T	ENGLAND	2-70	12P	12P		220P	10μ35	1μ	0.33μ	6800μ63	4.7K	4.7K			
	E	EUROPE														
A-57 (JAPAN MADE)	M	GENERAL MARKET	0-22	8P	10P	YES	NO	0.1μ	4.7μ35	0.1μ	5600μ	2.2K	2.2K	82 2W	T2.5A L	NO
	X	AUSTRALIA														
	T	ENGLAND	2-71	8P	10P		220P	10μ35	1μ	0.33μ	5600μ	2.0K	2.0K			
	E	EUROPE														
A-57 (SINGAPOLE MADE)	M	GENERAL MARKET	0-24	8P	10P		NO	0.1μ	4.7μ35	0.1μ	5600μ	2.2K	2.2K			
	X	AUSTRALIA														
	T	ENGLAND	2-73	8P	10P		220P	10μ35	1μ	0.33μ	5600μ	2.0K	2.0K			
	E	EUROPE														

(X85-12XX-XX)

MODEL			R5. 6	R40
A-77 JAPAN MADE	M	20-01	2. 37K	10
	X			
	T	20-00	2. 15K	JUMPER
	E			
A-77 SINGAPOLE MADE	M	30-01	2. 37K	10
	X			
	T	30-00	2. 15K	JUMPER
	E			
A-57	M	30-03	2. 87K	33
	X			
	T	30-02	2. 61K	22
	E			

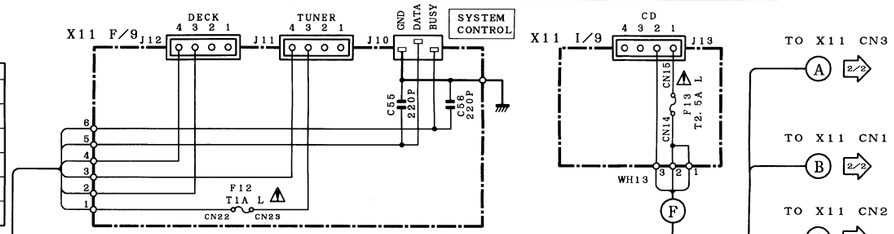

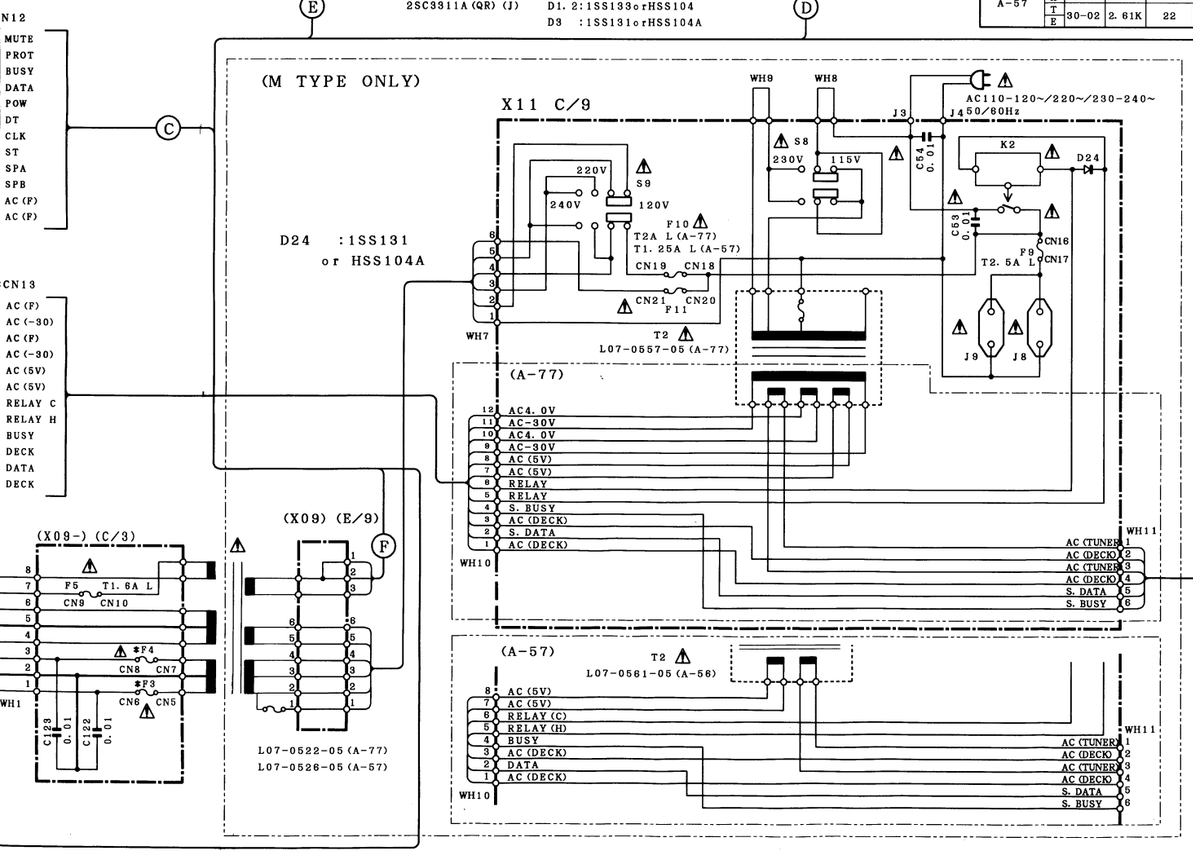

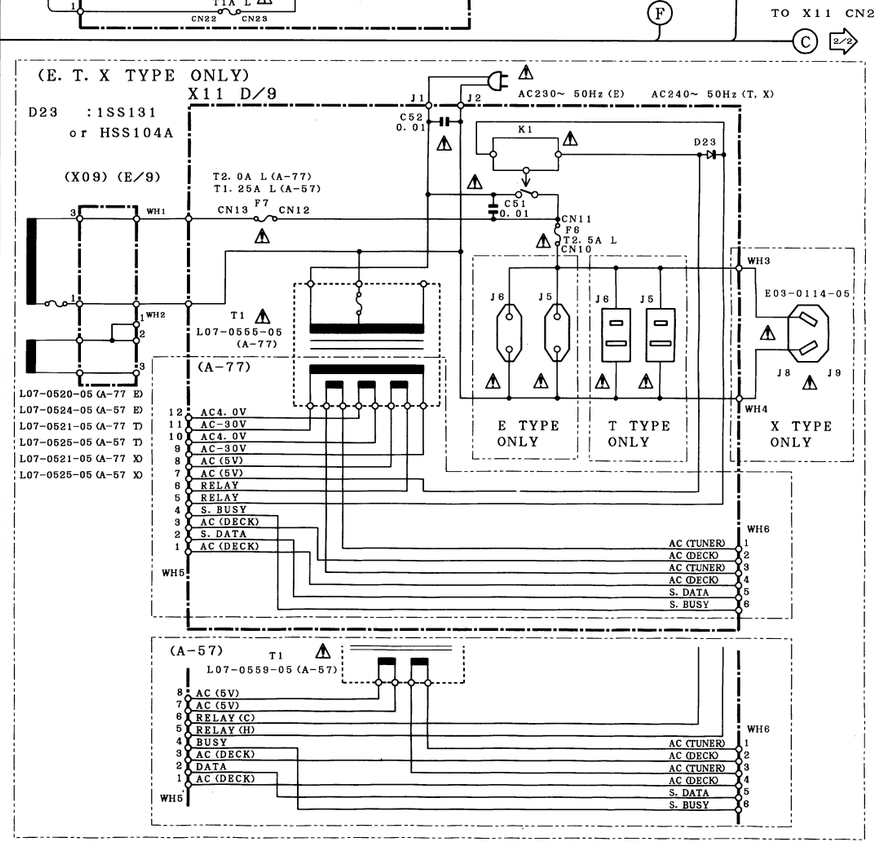

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

SIGNAL LINE
GND LINE
+B LINE
−B LINE

Y08-4972-70

A-57/77

KENWOOD

(A-77)

X11-33XX-XX (A/9)

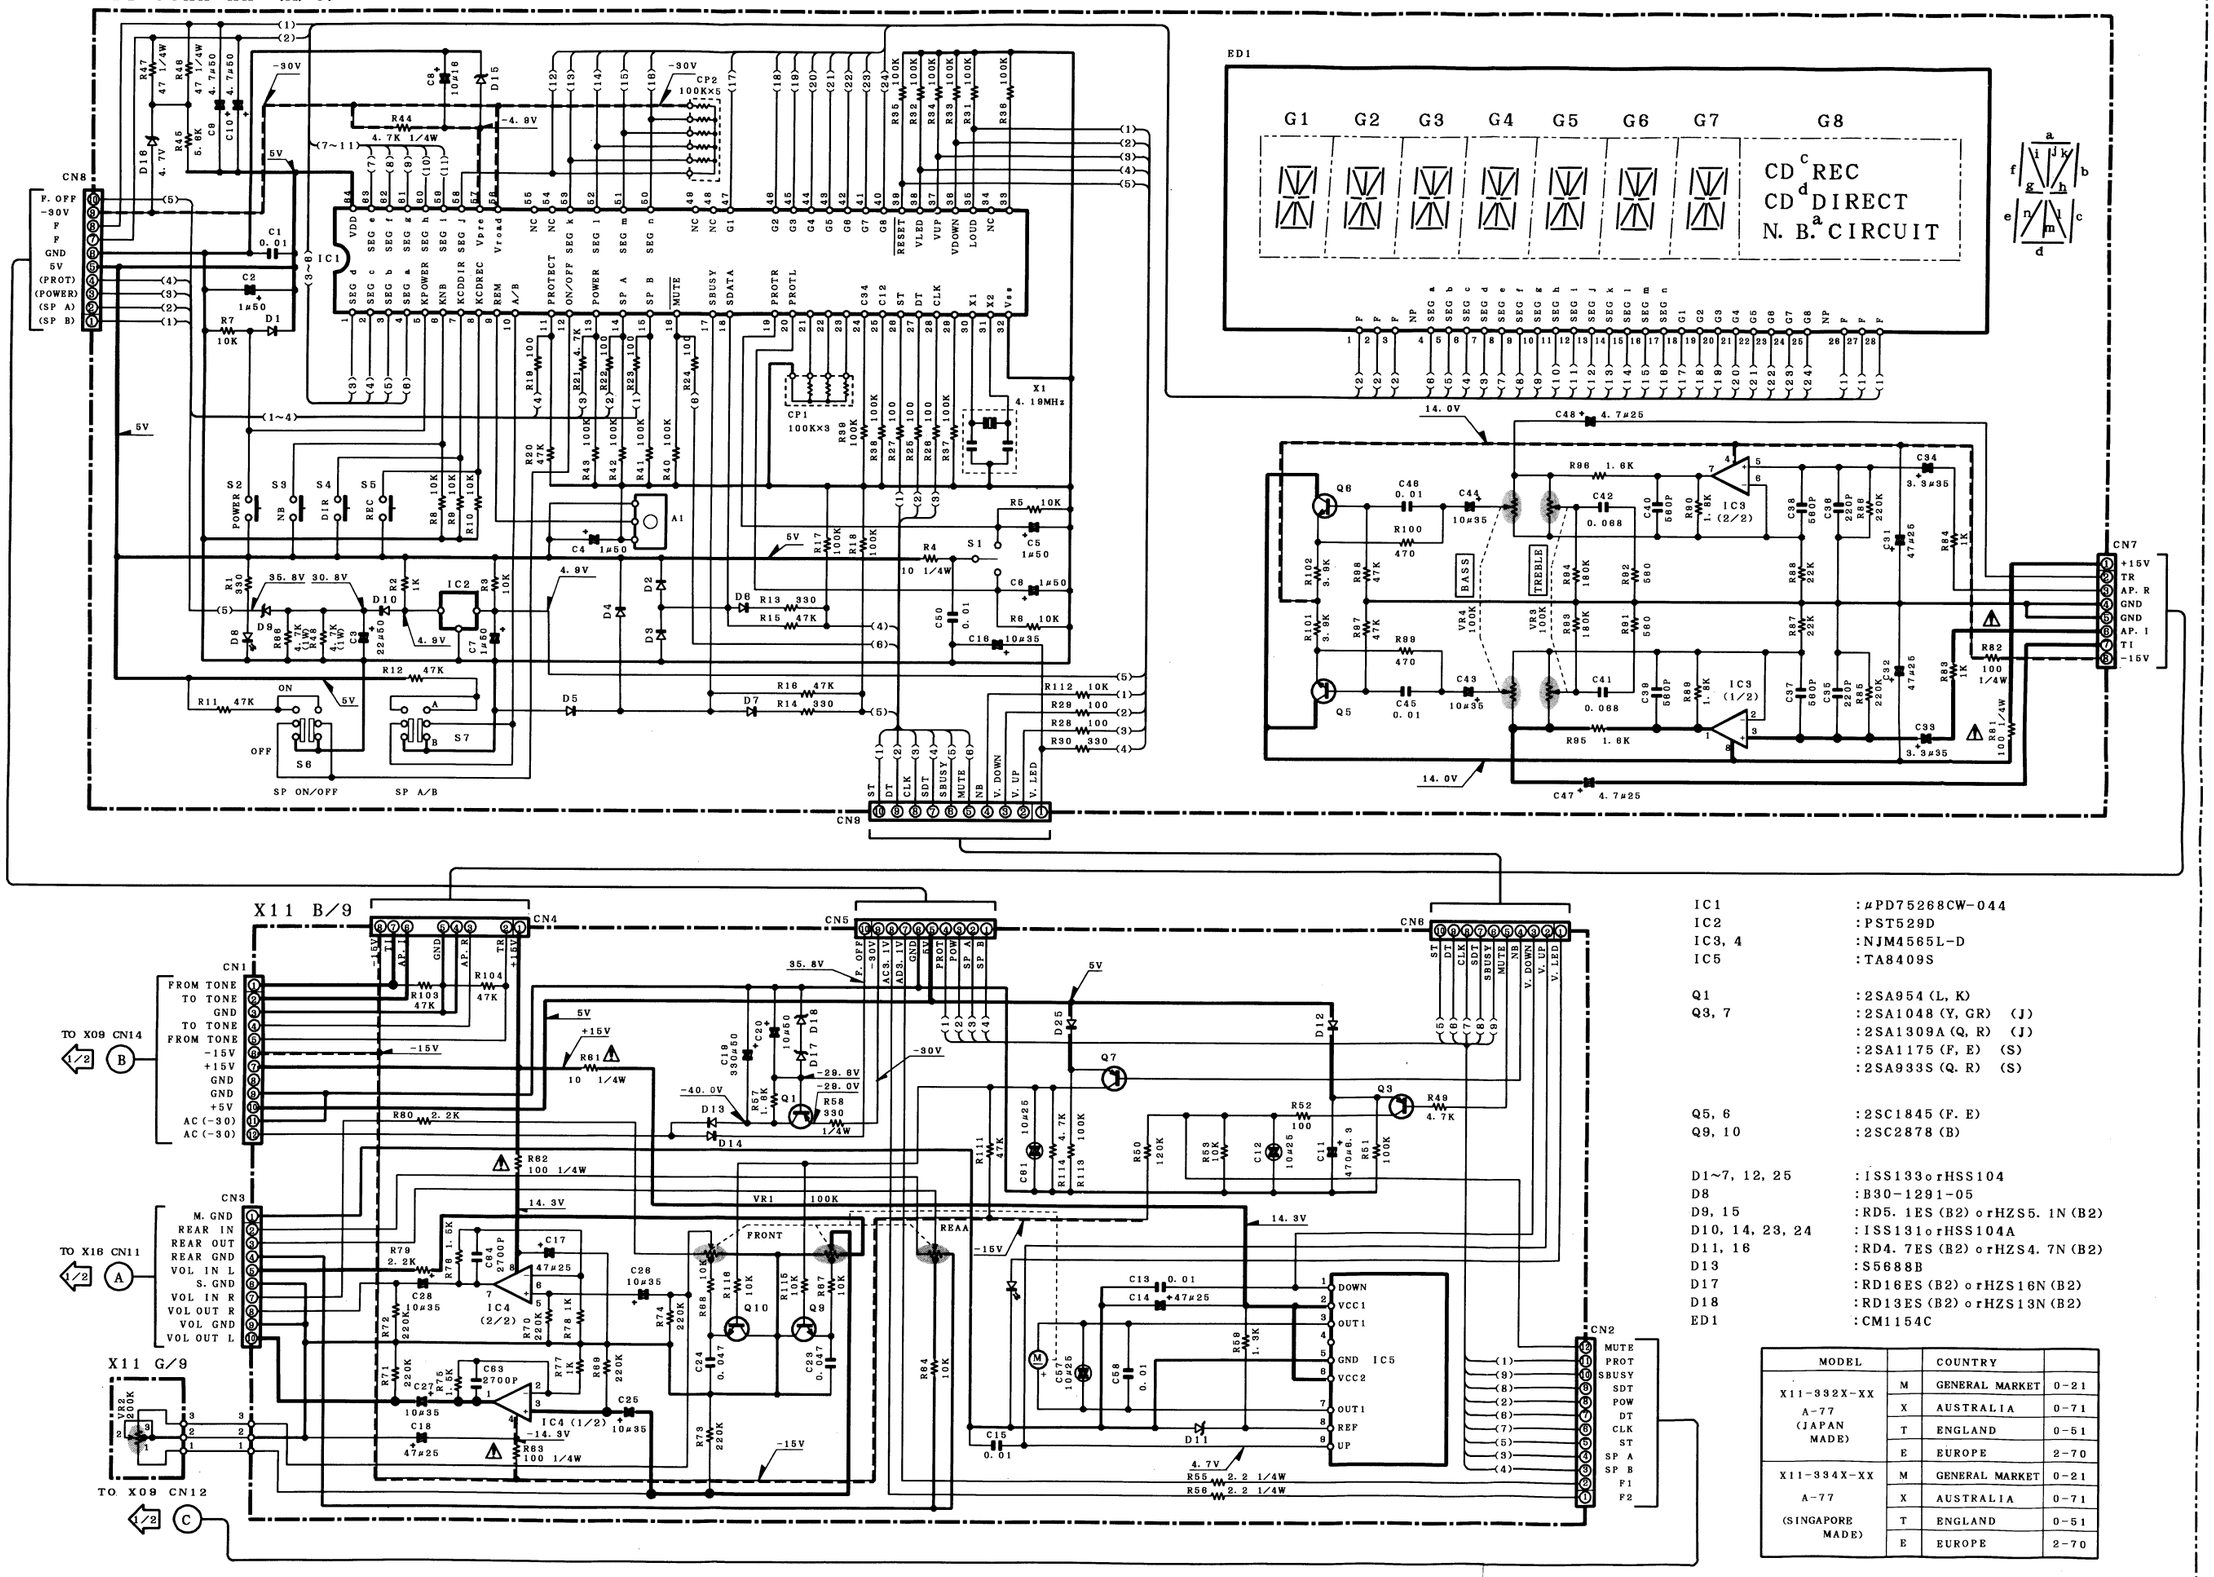

X11 B/9

IC1	: μPD75268CW-044
IC2	: PST529D
IC3, 4	: NJM4565L-D
IC5	: TA8409S
Q1	: 2SA954 (L, K)
Q3, 7	: 2SA1048 (Y, GR) (J) : 2SA1309A (Q, R) (J) : 2SA1175 (F, E) (S) : 2SA933S (Q. R) (S)
Q5, 6	: 2SC1845 (F. E)
Q9, 10	: 2SC2878 (B)
D1~7, 12, 25	: 1SS133 or HSS104
D8	: B30-1291-05
D9, 15	: RD5. 1ES (B2) or HZS5. 1N (B2)
D10, 14, 23, 24	: 1SS131 or HSS104A
D11, 16	: RD4. 7ES (B2) or HZS4. 7N (B2)
D13	: S5688B
D17	: RD16ES (B2) or HZS16N (B2)
D18	: RD13ES (B2) or HZS13N (B2)
ED1	: CM1154C

MODEL		COUNTRY	
X11-332X-XX A-77 (JAPAN MADE)	M	GENERAL MARKET	0-21
	X	AUSTRALIA	0-71
	T	ENGLAND	0-51
	E	EUROPE	2-70
X11-334X-XX A-77 (SINGAPORE MADE)	M	GENERAL MARKET	0-21
	X	AUSTRALIA	0-71
	T	ENGLAND	0-51
	E	EUROPE	2-70

(A-57)

X11-330X-XX

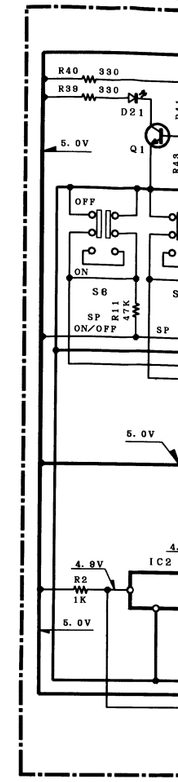

X11 B/

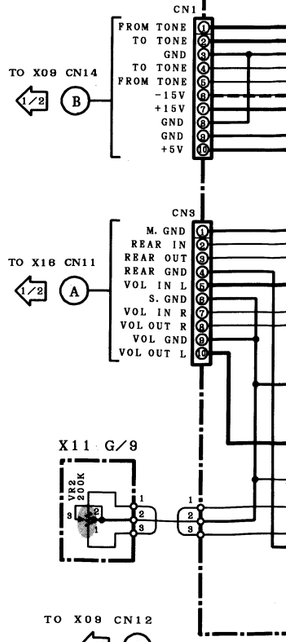

(A-57)

X11-330X-XX (A/9)

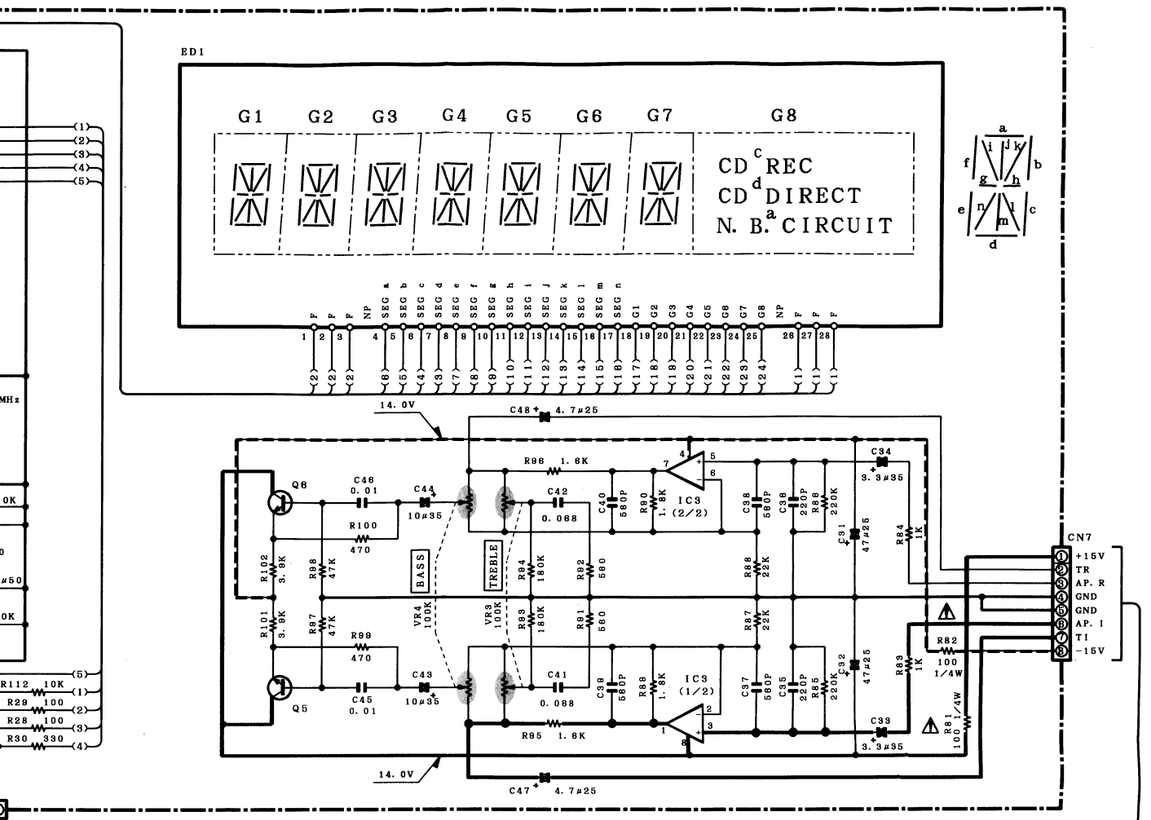

IC1	: μPD75268CW-044
IC2	: PST529D
IC3, 4	: NJM4565L-D
IC5	: TA8409S
Q1	: 2SA954 (L, K)
Q3, 7	: 2SA1048 (Y, GR) (J) : 2SA1309A (Q, R) (J) : 2SA1175 (F, E) (S) : 2SA933S (Q. R) (S)
Q5, 6	: 2SC1845 (F. E)
Q9, 10	: 2SC2878 (B)
D1~7, 12, 25	: ISS133 or HSS104
D8	: B30-1291-05
D9, 15	: RD5. 1ES (B2) or HZS5. 1N (B2)
D10, 14, 23, 24	: ISS131 or HSS104A
D11, 16	: RD4. 7ES (B2) or HZS4. 7N (B2)
D13	: S5688B
D17	: RD16ES (B2) or HZS16N (B2)
D18	: RD13ES (B2) or HZS13N (B2)
ED1	: CM1154C

MODEL		COUNTRY	
X11-332X-XX A-77 (JAPAN MADE)	M	GENERAL MARKET	0-21
	X	AUSTRALIA	0-71
	T	ENGLAND	0-51
	E	EUROPE	2-70
X11-334X-XX A-77 (SINGAPORE MADE)	M	GENERAL MARKET	0-21
	X	AUSTRALIA	0-71
	T	ENGLAND	0-51
	E	EUROPE	2-70

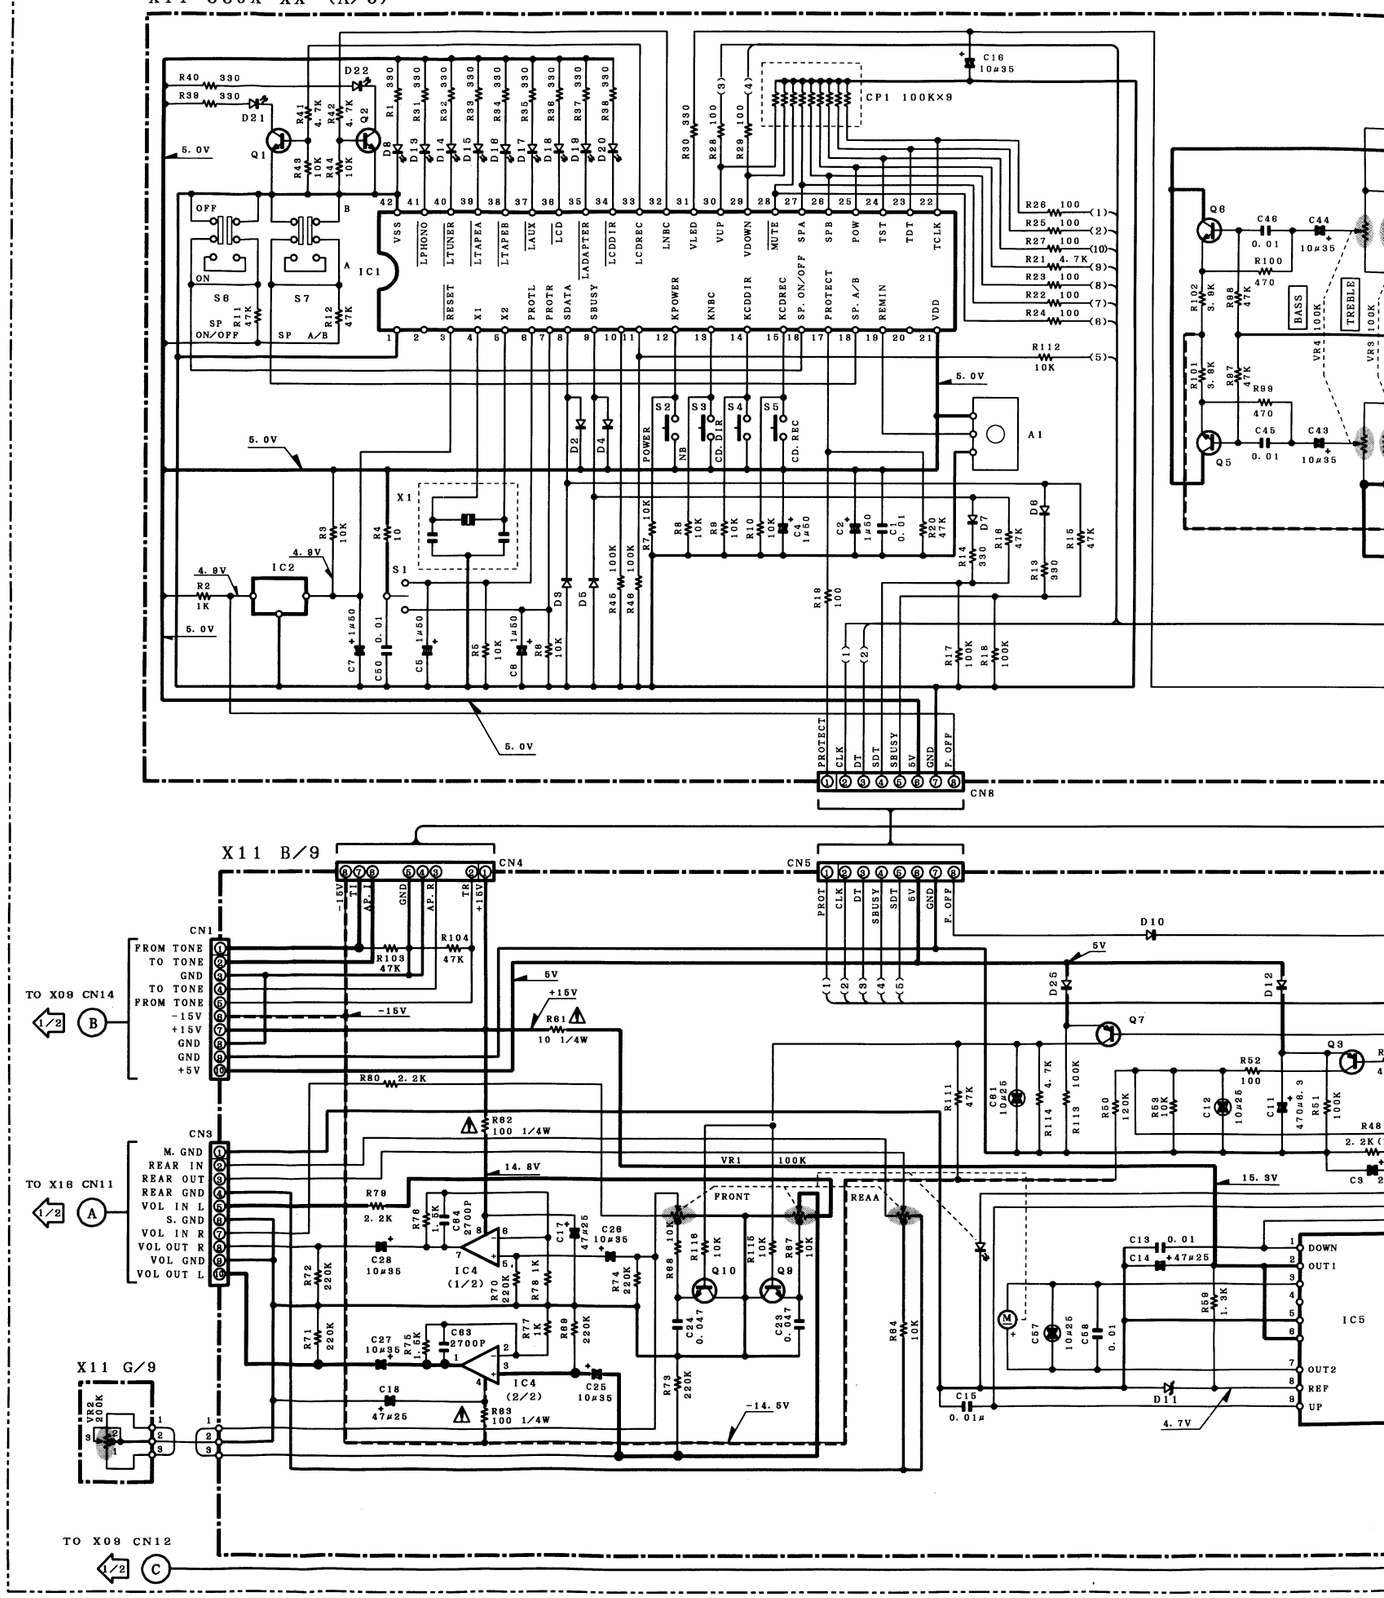

(A/9)

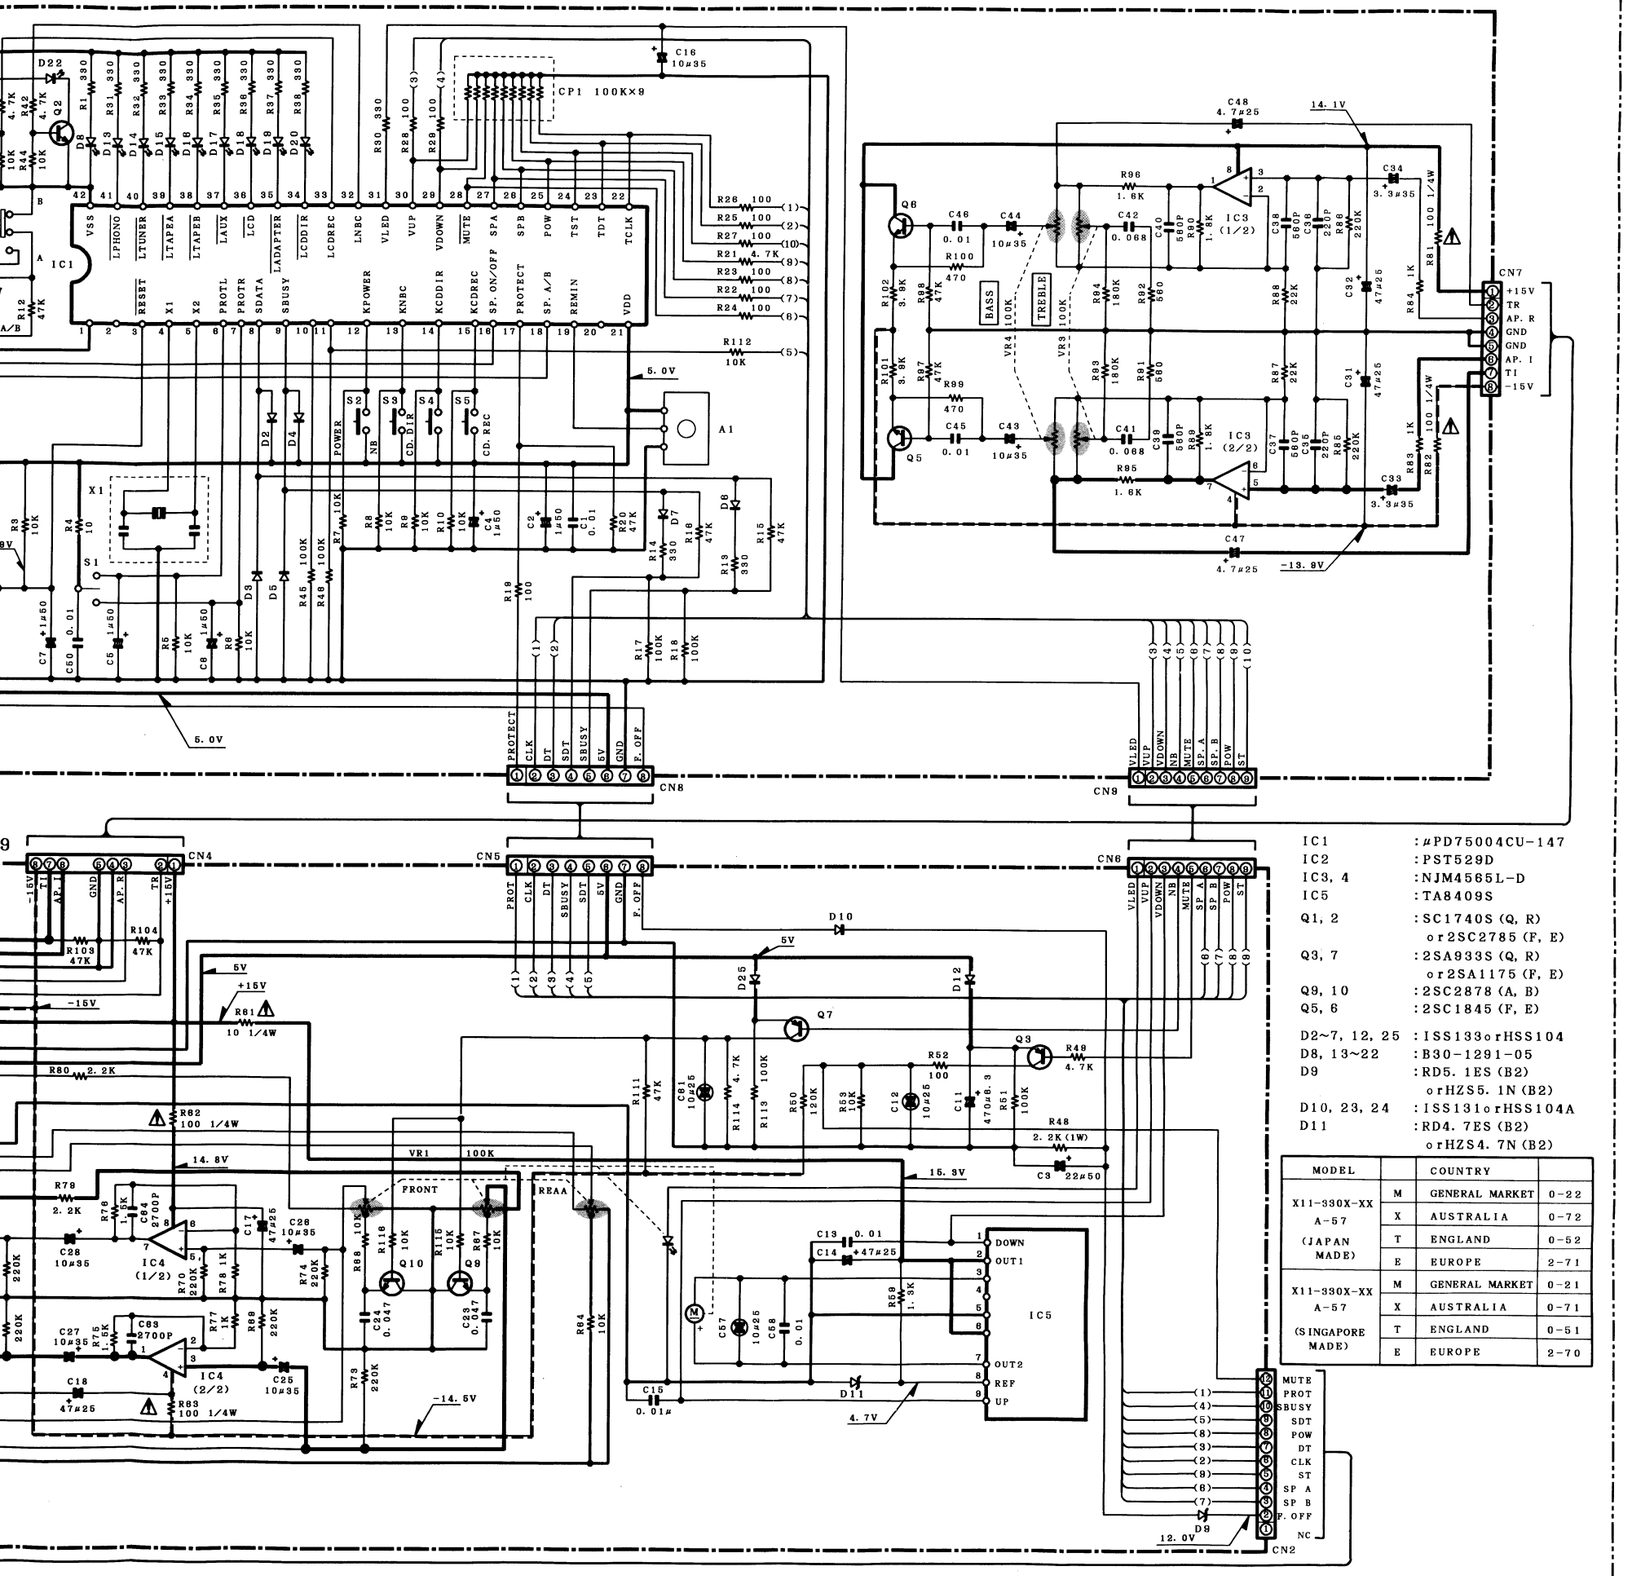

IC1	: μPD75004CU-147
IC2	: PST529D
IC3, 4	: NJM4565L-D
IC5	: TA8409S
Q1, 2	: SC1740S (Q, R) or 2SC2785 (F, E)
Q3, 7	: 2SA933S (Q, R) or 2SA1175 (F, E)
Q9, 10	: 2SC2878 (A, B)
Q5, 6	: 2SC1845 (F, E)
D2~7, 12, 25	: 1SS133 or HSS104
D8, 13~22	: B30-1291-05
D9	: RD5. 1ES (B2) or HZS5. 1N (B2)
D10, 23, 24	: 1SS131 or HSS104A
D11	: RD4. 7ES (B2) or HZS4. 7N (B2)

MODEL		COUNTRY	
X11-330X-XX A-57 (JAPAN MADE)	M	GENERAL MARKET	0-22
	X	AUSTRALIA	0-72
	T	ENGLAND	0-52
	E	EUROPE	2-71
X11-330X-XX A-57 (SINGAPORE MADE)	M	GENERAL MARKET	0-21
	X	AUSTRALIA	0-71
	T	ENGLAND	0-51
	E	EUROPE	2-70



2SA954 2SC1845
2SA992 2SC2003
2SC2878



2SB1531
2SD2340



2SA1175
2SC2785



DTC124ES 2SA933S
2SA1048 2SC1740C
2SC2458

2SC4137



2SB1492
2SD2254



UN4212 2SC3311A
2SA1309A



BA15218-DX



NJM2058D



UPC4574C



TA8409S



UPD75004CU-147



NJU7311L
NJU7313L



AN77805F



PST529D

UPC7805AHF
UPC7815AHF



TC9162N
TC9164N



UPD75268CW-044



TA7805S
TA7815S

UPC7915F



TA79015S



NJM4565L-D

DC voltages are as measured with a high impedance voltmeter with no signal input. Values may vary slightly due to variations between individual instruments or/and units.

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance sans signal d'entrée. Les valeurs peuvent différer légèrement du fait des variations inhérentes aux appareils et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser ohne Eingangssignal gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

SIGNAL LINE
GND LINE
+B LINE
-B LINE

CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). ⚠ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

2/2

Y08-4972-70

A-57/77

KENWOOD

EXPLODED VIEW (UNIT)

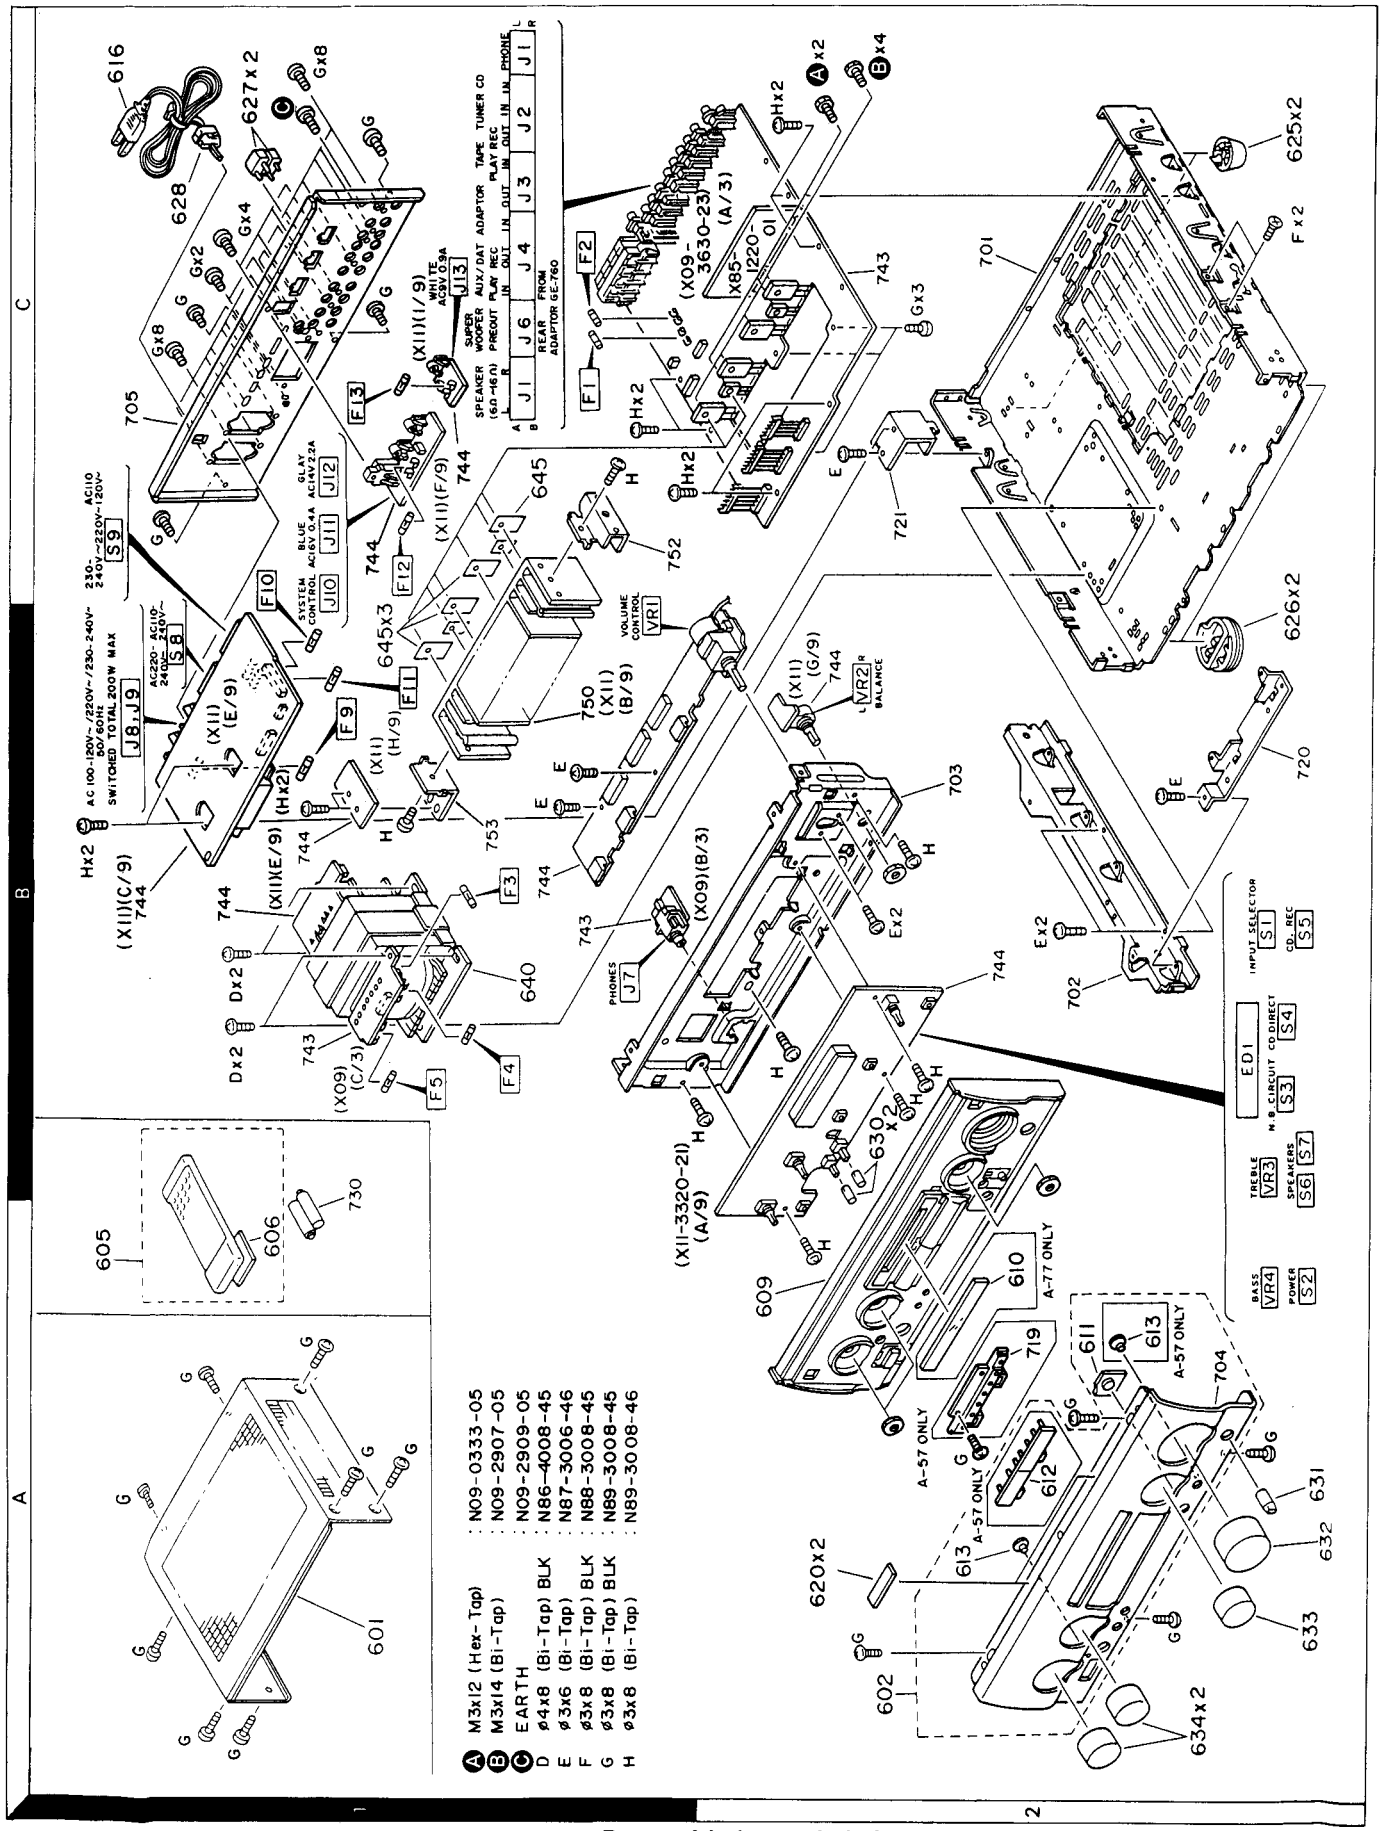

PARTS LIST

UNIT LIST(A-57)

	Destination	Singapore made	Japan made
AUDIO UNIT	M	X09-3630-22	X09-3630-24
	X	X09-3630-22	X09-3630-24
	T	X09-3632-71	X09-3632-73
	E	X09-3632-71	X09-3632-73
CONTROL UNIT	M	X11-3300-21	X11-3300-22
	X	X11-3300-71	X11-3300-72
	T	X11-3300-51	X11-3300-52
	E	X11-3302-70	X11-3302-71
MAIN AMPLIFIER UNIT	M	X85-1230-03	X85-1220-03
	X	X85-1230-03	X85-1220-03
	T	X85-1230-02	X85-1220-02
	E	X85-1230-02	X85-1220-02

(A-77)

	Destination	Singapore made	Japan made
AUDIO UNIT	M	X09-3630-21	X09-3630-23
	X	X09-3630-21	X09-3630-23
	T	X09-3632-70	X09-3632-72
	E	X09-3632-70	X09-3632-72
CONTROL UNIT	M	X11-3340-21	X11-3320-21
	X	X11-3340-71	X11-3320-71
	T	X11-3340-51	X11-3320-51
	E	X11-3342-70	X11-3322-70
MAIN AMPLIFIER UINT	M	X85-1230-01	X85-1220-01
	X	X85-1230-01	X85-1220-01
	T	X85-1230-00	X85-1220-00
	E	X85-1230-00	X85-1220-00

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.1

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
A-57 (JAPAN MADE)						
601	1A		A01-2948-01	METALLIC CABINET		
602	2A	*	A60-0488-02	PANEL ASSY		
605	1A	*	X94-1001-41	REMOTE CONTROL ASSY UNIT		
606	1B		A09-0115-13	BATTERY COVER		
609	2A		B01-0487-11	PANEL ESCUTCHEON		
611	2A		B12-0201-04	INDICATOR		
612	2A		B12-0202-04	INDICATOR		
613	2A		B19-1520-04	LIGHTING BOARD		
-			B46-0096-33	WARRANTY CARD	X	
-		*	B46-0310-03	WARRANTY CARD	ET	
-		*	B52-0528-00	CONNECTING DIAGRAM	ET	
-		*	B52-0529-00	CONNECTING DIAGRAM	MX	
-		*	B60-1302-00	INSTRUCTION MANUAL (ENGLISH)	ET	
-		*	B60-1303-00	INSTRUCTION MANUAL (FRENCH)	E	
-		*	B60-1304-00	INSTRUCTION MANUAL (GERMAN)	E	
-		*	B60-1305-00	INSTRUCTION MANUAL (DUTCH)	E	
-		*	B60-1306-00	INSTRUCTION MANUAL (ITALIAN)	E	
-		*	B60-1307-00	INSTRUCTION MANUAL (SPANISH)	E	
-		*	B60-1308-00	INSTRUCTION MANUAL (ENGLISH)	MX	
-		*	B60-1309-00	INSTRUCTION MANUAL (SPANISH)	M	
-		*	B60-1310-00	INSTRUCTION MANUAL (CHINESE)	M	
⚠ 616	1C		E30-2277-15	AC POWER CORD	EM	
⚠ 616	1C		E30-2715-05	AC POWER CORD	X	
⚠ 616	1C		E30-2719-05	AC POWER CORD	T	
⚠ J8 ,9	1B		E03-0141-05	AC OUTLET	X	
620	2A		G11-0155-14	SOFT TAPE (40X9X2)		
		*	H50-0774-04	ITEM CARTON CASE	EMX	
		*	H50-0775-04	ITEM CARTON CASE	T	
-		*	H10-5603-02	POLYSTYRENE FOAMED FIXTURE L	EMX	
-		*	H10-5604-02	POLYSTYRENE FOAMED FIXTURE R	EMX	
-		*	H10-5605-02	POLYSTYRENE FOAMED FIXTURE L	T	
-		*	H10-5606-02	POLYSTYRENE FOAMED FIXTURE R	T	
-		*	H13-0110-04	CARTON BOARD	X	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	EMX	
-			H25-0304-04	PROTECTION BAG	EMX	
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0656-04	PROTECTION BAG (0304 PRINTED)	T	
625	2C		J02-0366-15	FOOT REAR		
626	2C		J02-1040-05	FOOT FRONT		
627	1C		J12-0091-05	PIN		
⚠ 628	1C		J42-0083-05	POWER CORD BUSHING		
630	2B		K27-2081-14	KNOB SPEAKER ON/OFF,A/B		
631	2A		K29-2507-04	KNOB BALANCE		
632	2A		K29-4403-04	KNOB VOLUME CONTROL		
633	2A		K29-4404-04	KNOB INPUT SELECTOR		
634	2A		K29-4405-04	KNOB BASS,TRABLE		
640	1B	*	L07-0794-05	POWER TRANSFORMER	E	
640	1B	*	L07-0795-05	POWER TRANSFORMER	T	
640	1B	*	L07-0796-05	POWER TRANSFORMER	M	
640	1B	*	L07-0797-05	POWER TRANSFORMER	X	
T1		*	L07-0798-05	POWER TRANSFORMER	ETX	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.2

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
T2		*	L07-0799-05	POWER TRANSFORMER	M	
C	1C		N09-2909-05	TAPTITE SCREW		
D	2B		N86-4008-45	BINDING HEAD TAPTITE SCREW		
E	1B,2B		N87-3006-46	BRAZIER HEAD TAPTITE SCREW		
F	1B,1C		N88-3008-45	FLAT HEAD TAPTITE SCREW		
G	1A,1C		N89-3008-45	BINDING HEAD TAPTITE SCREW		
H	1B,2B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
A-57 (SINGAPORE MADE)						
601	1A		A01-2948-01	METALLIC CABINET		
602	2A	*	A60-0488-02	PANEL ASSY		
605	1B	*	X94-1011-41	REMOTE CONTROL ASSY UNIT		
606	1B		A09-0126-03	BATTERY COVER		
609	2A		B01-0487-11	PANEL ESCUTCHEON		
611	2A		B12-0201-04	INDICATOR		
612	2A		B12-0202-04	INDICATOR		
613	2A		B19-1520-04	LIGHTING BOARD		
-			B46-0096-33	WARRANTY CARD	X	
-			B46-0310-03	WARRANTY CARD	ET	
-		*	B52-0528-00	CONNECTING DIAGRAM	ET	
-		*	B52-0529-00	CONNECTING DIAGRAM	MX	
-		*	B60-1302-00	INSTRUCTION MANUAL (ENGLISH)	ET	
-		*	B60-1303-00	INSTRUCTION MANUAL (FRENCH)	E	
-		*	B60-1304-00	INSTRUCTION MANUAL (GERMAN)	E	
-		*	B60-1305-00	INSTRUCTION MANUAL (DUTCH)	E	
-		*	B60-1306-00	INSTRUCTION MANUAL (ITALIAN)	E	
-		*	B60-1307-00	INSTRUCTION MANUAL (SPANISH)	E	
-		*	B60-1308-00	INSTRUCTION MANUAL (ENGLISH)	MX	
-		*	B60-1309-00	INSTRUCTION MANUAL (SPANISH)	M	
-		*	B60-1310-00	INSTRUCTION MANUAL (CHINESE)	M	
⚠ 616	1C		E30-2277-15	AC POWER CORD	EM	
⚠ 616	1C		E30-2715-05	AC POWER CORD	X	
⚠ 616	1C		E30-2719-05	AC POWER CORD	T	
⚠ J8 ,9	1B		E03-0141-05	AC OUTLET	X	
620	2A		G11-0155-14	SOFT TAPE (40X9X2)		
		*	H50-0780-04	ITEM CARTON CASE	E	
		*	H50-0781-04	ITEM CARTON CASE	T	
		*	H50-0782-04	ITEM CARTON CASE	M	
		*	H50-0783-04	ITEM CARTON CASE	X	
-		*	H10-5625-02	POLYSTYRENE FOAMED FIXTURE L	EMX	
-		*	H10-5626-02	POLYSTYRENE FOAMED FIXTURE R	EMX	
-		*	H10-5627-02	POLYSTYRENE FOAMED FIXTURE L	T	
-		*	H10-5628-02	POLYSTYRENE FOAMED FIXTURE R	T	
-		*	H13-0111-14	CARTON BOARD	X	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	EMX	
-			H25-0304-04	PROTECTION BAG	EMX	
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0656-04	PROTECTION BAG (0304 PRINTED)	T	
625	2C		J02-0366-15	FOOT REAR		
626	2C		J02-1040-05	FOOT FRONT		
627	1C		J12-0091-05	PIN		
⚠ 628	1C		J42-0083-05	POWER CORD BUSHING		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.3

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
630	2A		K27-2081-14	KNOB SPEAKER ON/OFF,A/B		
631	2A		K29-2507-04	KNOB BALANCE		
632	2A		K29-4403-04	KNOB VOLUME CONTROL		
633	2A		K29-4404-04	KNOB INPUT SELECTOR		
634	2A		K29-4405-04	KNOB BASS,TREBLE		
⚠ 640	1B		L07-0524-15	POWER TRANSFORMER	E	
⚠ 640	1B		L07-0525-15	POWER TRANSFORMER	T	
⚠ 640	1B		L07-0526-15	POWER TRANSFORMER	M	
⚠ 640	1B	*	L07-0648-05	POWER TRANSFORMER	X	
⚠ T1			L07-0559-05	POWER TRANSFORMER	ETX	
⚠ T2			L07-0561-05	POWER TRANSFORMER	M	
C	1C		N09-2909-05	TAPTITE SCREW		
D	2B		N86-4008-45	BINDING HEAD TAPTITE SCREW		
E	1B,2B		N87-3006-46	BRAZIER HEAD TAPTITE SCREW		
F	1B,1C		N88-3008-45	FLAT HEAD TAPTITE SCREW		
G	1A,1C		N89-3008-45	BINDING HEAD TAPTITE SCREW		
H	1B,2B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
A-77 (JAPAN MADE)						
601	1A		A01-2946-01	METALLIC CABINET		
602	2A	*	A60-0486-02	PANEL ASSY		
605	1A	*	X94-1001-41	REMOTE CONTROL ASSY UNIT		
606	1A		A09-0115-13	BATTERY COVER		
609	2A		B01-0486-11	PANEL ESCUTCHEON		
610	2A		B10-1922-03	FRONT GLASS		
611	2A		B12-0201-04	INDICATOR		
613	2A		B19-1520-04	LIGHTING BOARD		
-			B46-0096-33	WARRANTY CARD	X	
-		*	B46-0310-03	WARRANTY CARD	ET	
-		*	B52-0528-00	CONNECTING DIAGRAM	ET	
-		*	B52-0529-00	CONNECTING DIAGRAM	MX	
-		*	B60-1302-00	INSTRUCTION MANUAL (ENGLISH)	ET	
-		*	B60-1303-00	INSTRUCTION MANUAL (FRENCH)	E	
-		*	B60-1304-00	INSTRUCTION MANUAL (GERMAN)	E	
-		*	B60-1305-00	INSTRUCTION MANUAL (DUTCH)	E	
-		*	B60-1306-00	INSTRUCTION MANUAL (ITALIAN)	E	
-		*	B60-1307-00	INSTRUCTION MANUAL (SPANISH)	E	
-		*	B60-1309-00	INSTRUCTION MANUAL (SPANISH)	M	
-		*	B60-1310-00	INSTRUCTION MANUAL (ENGLISH)	M	
⚠ 616	1C		E30-2277-15	AC POWER CORD	EM	
⚠ 616	1C		E30-2715-05	AC POWER CORD	X	
⚠ 616	1C		E30-2719-05	AC POWER CORD	T	
⚠ J8 ,9	1B		E03-0141-05	AC OUTLET	X	
620	2A		G11-0155-14	SOFT TAPE (40X9X2)		
		*	H50-0772-04	ITEM CARTON CASE	EMX	
		*	H50-0773-04	ITEM CARTON CASE	T	
-		*	H10-5603-02	POLYSTYRENE FOAMED FIXTURE L	EMX	
-		*	H10-5604-02	POLYSTYRENE FOAMED FIXTURE R	EMX	
-		*	H10-5605-02	POLYSTYRENE FOAMED FIXTURE L	T	
-		*	H10-5606-02	POLYSTYRENE FOAMED FIXTURE R	T	
-		*	H13-0110-04	CARTON BOARD	X	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	EMX	
-			H25-0304-04	PROTECTION BAG	EMX	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

× New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.4

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0656-04	PROTECTION BAG (0304 PRINTED)	T	
625	2C		J02-0366-15	FOOT REAR		
626	2C		J02-1040-05	FOOT FRONT		
627	1C		J12-0091-05	PIN		
⚠ 628	1C		J42-0083-05	POWER CORD BUSHING		
630	2B		K27-2081-14	KNOB SPEAKER ON/OFF,A/B		
631	2A		K29-2507-04	KNOB BALANCE		
632	2A		K29-4403-04	KNOB VOLUME CONTROL		
633	2A		K29-4404-04	KNOB INPUT SELECTOR		
634	2A		K29-4405-04	KNOB BASS,TREBLE		
⚠ 640	1B		L07-0520-15	POWER TRANSFORMER	E	
⚠ 640	1B		L07-0521-15	POWER TRANSFORMER	T	
⚠ 640	1B		L07-0522-15	POWER TRANSFORMER	M	
⚠ 640	1B		L07-0647-05	POWER TRANSFORMER	X	
⚠ T1			L07-0555-05	POWER TRANSFORMER	ETX	
⚠ T2			L07-0557-05	POWER TRANSFORMER	M	
C	1C		N09-2909-05	TAPTITE SCREW		
D	2B		N86-4008-45	BINDING HEAD TAPTITE SCREW		
E	1B,2B		N87-3006-46	BRAZIER HEAD TAPTITE SCREW		
F	1B,1C		N88-3008-45	FLAT HEAD TAPTITE SCREW		
G	1A,1C		N89-3008-45	BINDING HEAD TAPTITE SCREW		
H	1B,2B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
A-77 (SINGAPORE MADE)						
601	1A		A01-2946-01	METALLIC CABINET		
602	2A	*	A60-0486-02	PANEL ASSY		
605	1A	*	X94-1011-41	REMOTE CONTROL ASSY UNIT		
606	1B		A09-0126-03	BATTERY COVER		
609	2A		B01-0486-11	PANEL ESCUTCHEON		
610	2A		B10-1922-03	FRONT GLASS		
611	2A		B12-0201-04	INDICATOR		
613	2A		B19-1520-04	LIGHTING BOARD		
-			B46-0096-33	WARRANTY CARD	X	
-		*	B46-0310-03	WARRANTY CARD	ET	
-		*	B52-0528-00	CONNECTING DIAGRAM	ET	
-		*	B52-0529-00	CONNECTING DIAGRAM	MX	
-		*	B60-1302-00	INSTRUCTION MANUAL (ENGLISH)	ET	
-		*	B60-1303-00	INSTRUCTION MANUAL (FRENCH)	E	
-		*	B60-1304-00	INSTRUCTION MANUAL (GERMAN)	E	
-		*	B60-1305-00	INSTRUCTION MANUAL (DUTCH)	E	
-		*	B60-1306-00	INSTRUCTION MANUAL (ITALIAN)	E	
-		*	B60-1307-00	INSTRUCTION MANUAL (SPANISH)	E	
-		*	B60-1308-00	INSTRUCTION MANUAL (ENGLISH)	MX	
-		*	B60-1309-00	INSTRUCTION MANUAL (SPANISH)	M	
-		*	B60-1310-00	INSTRUCTION MANUAL (CHINESE)	M	
⚠ 616	1C		E30-2277-15	AC POWER CORD	EM	
⚠ 616	1C		E30-2715-05	AC POWER CORD	X	
⚠ 616	1C		E30-2719-05	AC POWER CORD	T	
⚠ J8 ,9	1B		E03-0141-05	AC OUTLET	X	
620	2A		G11-0155-14	SOFT TAPE (40X9X2)		
		*	H50-0776-04	ITEM CARTON CASE	E	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.5

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
		*	H50-0777-04	ITEM CARTON CASE	T	
		*	H50-0778-04	ITEM CARTON CASE	M	
		*	H50-0779-04	ITEM CARTON CASE	X	
-		*	H10-5625-02	POLYSTYRENE FOAMED FIXTURE L	EMX	
-		*	H10-5626-02	POLYSTYRENE FOAMED FIXTURE R	EMX	
-		*	H10-5627-02	POLYSTYRENE FOAMED FIXTURE L	T	
-		*	H10-5628-02	POLYSTYRENE FOAMED FIXTURE R	T	
-		*	H13-0111-14	CARTON BOARD	X	
-			H25-0232-04	PROTECTION BAG (235X350X0.03)	EMX	
-			H25-0304-04	PROTECTION BAG	EMX	
-			H25-0651-04	PROTECTION BAG (0232 PRINTED)	T	
-			H25-0656-04	PROTECTION BAG (0304 PRINTED)	T	
625	2C		J02-0366-15	FOOT REAR		
626	2C		J02-1040-05	FOOT FRONT		
627	1C		J12-0091-05	PIN		
⚠ 628	1C		J42-0083-05	POWER CORD BUSHING		
630	2B		K27-2081-14	KNOB SPEAKER ON/OFF,A/B		
631	2A		K29-2507-04	KNOB BALANCE		
632	2A		K29-4403-04	KNOB VOLUME CONTROL		
633	2A		K29-4404-04	KNOB INPUT SELECTOR		
634	2A		K29-4405-04	KNOB BASS,TREBLE		
⚠ 640	1B		L07-0520-15	POWER TRANSFORMER	E	
⚠ 640	1B		L07-0521-15	POWER TRANSFORMER	T	
⚠ 640	1B		L07-0522-15	POWER TRANSFORMER	M	
⚠ 640	1B		L07-0647-05	POWER TRANSFORMER	X	
⚠ T1			L07-0555-05	POWER TRANSFORMER	ETX	
⚠ T2			L07-0557-05	POWER TRANSFORMER	M	
C	1C		N09-2909-05	TAPTITE SCREW		
D	2B		N86-4008-45	BINDING HEAD TAPTITE SCREW		
E	1B,2B		N87-3006-46	BRAZIER HEAD TAPTITE SCREW		
F	1B,1C		N88-3008-45	FLAT HEAD TAPTITE SCREW		
G	1A,1C		N89-3008-45	BINDING HEAD TAPTITE SCREW		
H	1B,2B		N89-3008-46	BINDING HEAD TAPTITE SCREW		
AUDIO UNIT (X09-363X-XX)						
C1 ,2			CC45FSL1H221J	CERAMIC 220PF J		
C3 ,4			CK45FF1H223Z	CERAMIC 0.022UF Z		
C5 ,6			CK45FB1H222K	CERAMIC 2200PF K		
C7 ,8			CE04KW1V100M	ELECTRO 10UF 35WV		J
C7 ,8			CE04LW1V100M	ELECTRO 10UF 35WV		S
C9 ,10			CC45FSL1H221J	CERAMIC 220PF J		
C11 ,12			CE04KW1A101M	ELECTRO 100UF 10WV		J
C11 ,12			CE04LW1A101M	ELECTRO 100UF 10WV		S
C13 ,14			CF92FV1H123J	MF 0.012UF J		
C15 ,16			CF92FV1H332J	MF 3300PF J		
C17 ,18			CE04KW1H010M	ELECTRO 1.0UF 50WV		J
C17 ,18			CE04LW1H010M	ELECTRO 1.0UF 50WV		S
C19 ,20			CE04KW1E470M	ELECTRO 47UF 25WV		J
C19 ,20		*	CE04LW1E470M	ELECTRO 47UF 25WV		S
C21 -26			C91-0749-05	CERAMIC 220PF K	ET	
C27 ,28			CE04KW1V100M	ELECTRO 10UF 35WV		J
C27 ,28			CE04LW1V100M	ELECTRO 10UF 35WV		S
C29 ,30			CC45FSL1H101J	CERAMIC 100PF J		
C31 ,32			CE04KW1V100M	ELECTRO 10UF 35WV		J

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.6

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C31 ,32			CE04LW1V100M	ELECTRO 10UF 35WV		S
C33 ,34			C91-0749-05	CERAMIC 220PF K	ET	
C35 ,36			CC45FSL1H221J	CERAMIC 220PF J	ET	
C37 ,38			CE04KW1V100M	ELECTRO 10UF 35WV		J
C37 ,38			CE04LW1V100M	ELECTRO 10UF 35WV		S
C39 ,40			CC45FSL1H101J	CERAMIC 100PF J		
C41 ,42			CE04KW1V100M	ELECTRO 10UF 35WV		J
C41 ,42			CE04LW1V100M	ELECTRO 10UF 35WV		S
C43 -48			CC45FSL1H221J	CERAMIC 220PF J	ET	
C49 ,50			CE04KW1R0R1M	ELECTRO 0.1UF 50WV	MX	5J
C49 ,50			CE04KW1V100M	ELECTRO 10UF 35WV	ET	J
C49 ,50			CE04LW1R0R1M	ELECTRO 0.1UF 50WV	MX	5S
C49 ,50			CE04LW1V100M	ELECTRO 10UF 35WV	ET	S
C49 ,50			CF92FV1H473J	MF 0.047UF J	MX	
C51 ,52			CK45FB1H561K	CERAMIC 560PF K		
C53 ,54			CE04KW1V100M	ELECTRO 10UF 35WV		J
C53 ,54			CE04LW1V100M	ELECTRO 10UF 35WV		S
C55 ,56			CF92FV1H124J	MF 0.12UF J		
C57 ,58			CE04KW1H010M	ELECTRO 1.0UF 50WV	ET	J
C57 ,58			CE04KW1V4R7M	ELECTRO 4.7UF 35WV	MX	J
C57 ,58			CE04LW1H010M	ELECTRO 1.0UF 50WV	ET	S
C57 ,58			CE04LW1V4R7M	ELECTRO 4.7UF 35WV	MX	S
C59 ,60			CF92FV1H104J	MF 0.10UF J	MX	
C59 ,60			CF92FV1H334J	MF 0.33UF J	ET	
C61 ,62			CE04KW1E470M	ELECTRO 47UF 25WV		J
C61 ,62		*	CE04LW1E470M	ELECTRO 47UF 25WV		S
C63 ,64			CK45FF1H103Z	CERAMIC 0.010UF Z		
C65 ,66			CK45FB1H222K	CERAMIC 2200PF K		
C67 -70			CF92FV1H104J	MF 0.10UF J		
C71 ,72			C90-1942-05	ELECTRO 6800UF 63WV		7J
C71 ,72			C90-1942-05	ELECTRO 6800UF 63WV		7S
C71 ,72			C90-1943-15	ELECTRO 5600UF 55WV		5J
C71 ,72			C90-1943-15	ELECTRO 5600UF 55WV		5S
C73 -76			CF92FV1H682J	MF 6800PF J		
C77 ,78			CC45FSL1H221J	CERAMIC 220PF J		
C79			CE04KW1A101M	ELECTRO 100UF 10WV		J
C79			CE04LW1A101M	ELECTRO 100UF 10WV		S
C81			CE04KW1H010M	ELECTRO 1.0UF 50WV		J
C81			CE04LW1H010M	ELECTRO 1.0UF 50WV		S
C82			CE04KW1V100M	ELECTRO 10UF 35WV		J
C82			CE04LW1V100M	ELECTRO 10UF 35WV		S
C102			CK45FB1H102K	CERAMIC 1000PF K		
C103			CK45FB1H222K	CERAMIC 2200PF K		
C104			CK45FB1H102K	CERAMIC 1000PF K		
C105			CK45FB1H222K	CERAMIC 2200PF K		
C106,107			CK45FB1H102K	CERAMIC 1000PF K		
C110			CE04KW1E102M	ELECTRO 1000UF 25WV		J
C110			CE04LW1E102M	ELECTRO 1000UF 25WV		S
C111,112			CF92FV1H124J	MF 0.12UF J		
C113			CE04KW1A101M	ELECTRO 100UF 10WV		J
C113			CE04LW1A101M	ELECTRO 100UF 10WV		S
C114			CF92FV1H124J	MF 0.12UF J		
C115			CE04KW1V102M	ELECTRO 1000UF 35WV		J
C115			CE04LW1V102M	ELECTRO 1000UF 35WV		S
C116			CE04KW1C101M	ELECTRO 100UF 16WV		J

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.7

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
C116			CE04LW1C101M	ELECTRO 100UF 16WV		S
C117,118			CF92FV1H124J	MF 0.12UF J		
C119			CE04KW1V102M	ELECTRO 1000UF 35WV		J
C119			CE04LW1V102M	ELECTRO 1000UF 35WV		S
C120			CE04KW1C101M	ELECTRO 100UF 16WV		J
C120			CE04LW1C101M	ELECTRO 100UF 16WV		S
C121			CF92FV1H124J	MF 0.12UF J		
C122,123			CK45FE2H103P	CERAMIC 0.010UF P		
C124			CE04KW1A101M	ELECTRO 100UF 10WV		J
C124			CE04LW1A101M	ELECTRO 100UF 10WV		S
C125			CE04KW1J100M	ELECTRO 10UF 63WV		J
C125			CE04LW1J100M	ELECTRO 10UF 63WV		S
C126-128			CK45FF1H223Z	CERAMIC 0.022UF Z		
C129			CE04KW1V100M	ELECTRO 10UF 35WV		J
C129			CE04LW1V100M	ELECTRO 10UF 35WV		S
C130			CK45FF1H223Z	CERAMIC 0.022UF Z		
C131			CE04KW1C101M	ELECTRO 100UF 16WV		J
C131			CE04LW1C101M	ELECTRO 100UF 16WV		S
C132,133			CE04KW1E470M	ELECTRO 47UF 25WV		J
C132,133		*	CE04LW1E470M	ELECTRO 47UF 25WV		S
C134-137			CK45FF1H103Z	CERAMIC 0.010UF Z		
J1			E13-0249-05	PHONO JACK PHONO		
J2			E13-0633-05	PHONO JACK CD,TUNER,TAPE/REC		
J3			E13-0445-05	PHONO JACK TAPE/PLAY,ADPT/OUT		
J4			E13-0633-05	PHONO JACK ADPT/IN,AUX/IN/OUT		
J5			E20-0823-05	LOCK TERMINAL BOARD SPEAKERS		
J6			E13-0317-05	PHONO JACK REAR,S WOOFER		
J7			E11-0208-05	PHONE JACK HEAD PHONE		
645	1C		F20-1284-05	INSULATING BOARD		S
645	1C		F20-1284-05	INSULATING BOARD		5
645	1C		F20-1297-05	INSULATING SHEET		5S
645	1C		F20-1297-05	INSULATING SHEET		
⚠ F1 ,2			F06-1022-05	FUSE (SEMKO) (250V T1AL)		
⚠ F3 ,4			F05-2525-05	FUSE (SEMKO) (250V T2.5A)		5
⚠ F3 ,4			F05-4025-05	FUSE (SEMKO) (250V T4A)		7
⚠ F5			F05-1623-05	FUSE (SEMKO) (250V T1.6A)		
-			J11-0098-05	WIRE CLAMPER		
CN1 -10			J13-0075-05	FUSE CLIP		
L1 ,2			L39-0085-05	PHASE COMPENSATION COIL		
CP1 ,2			R90-0187-05	MULTI-COMP 0.22X2 K 5W		
CP1 ,2			R90-0826-05	MULTI-COMP 0.22X2 J 5W		
R17 ,18			RS14KB3A101J	FL-PROOF RS 100 J 1W		
R79 ,80			RS14KB3A101J	FL-PROOF RS 100 J 1W		
R97 -100			RD14NB2E4R7J	RD 4.7 J 1/4W		
R105,106			RS14KB3D100J	FL-PROOF RS 10 J 2W		
R107,108			RD14NB2E100J	RD 10 J 1/4W		
R115,116			RS14KB3D331J	FL-PROOF RS 330 J 2W		
R163			RS14KB3D470J	FL-PROOF RS 47 J 2W		7
R163			RS14KB3D820J	FL-PROOF RS 82 J 2W		5
R171			RS14KB3D181J	FL-PROOF RS 180 J 2W		
K1 ,2			S76-0005-05	MAGNETIC RELAY		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Telle ohne Parts No. werden nicht geliefert.

NO.8

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
D1 -6			HSS104	DIODE		
D1 -6			1SS133	DIODE		
D31 -34			HSS104	DIODE		5
D31 -34			1SS133	DIODE		5
D31 ,32			HSS104	DIODE		7
D31 ,32			1SS133	DIODE		7
D35 -42			S5688B	DIODE		
D35 -42			1SR139-100	DIODE		
D44 ,45			HSS104	DIODE		
D44 ,45			1SS133	DIODE		
D46			D5SBA20F03	DIODE		
D46			RBV-602LFA	DIODE		
D47			HSS104	DIODE		
D47			1SS133	DIODE		
D48			HZS4.7N(B2)	ZENER DIODE		
D48			RD4.7ES(B2)	ZENER DIODE		
D49 -54			HSS104	DIODE		
D49 -54			1SS133	DIODE		
IC1			BA15218-DX	IC(OP AMP X2)		
IC1			XRA15218-DX	IC(OP AMP X2)		
IC2			NJM2058D	IC(OP AMP X4)		
IC2			UPC4574C	IC(OP AMP X4)		
IC3			BA15218-DX	IC(OP AMP X2)		
IC3			XRA15218-DX	IC(OP AMP X2)		
IC4			NJU7313L	IC(ANALOG SWITCH)		
IC4			TC9164N	IC(16CH BILATERAL SELECTOR SW)		
IC5			BA15218-DX	IC(OP AMP X2)		
IC5			XRA15218-DX	IC(OP AMP X2)		
IC6			NJU7311L	IC(ANALOG SWITCH)		
IC6			TC9162N	IC(ANALOG SWITCH ARRAY)		
IC7			AN7805F	IC(VOLTAGE REGULATOR/ +5V)		
IC7			TA7805S	IC(VOLTAGE REGULATOR/ +5V)		
IC7			UPC7805AHF	IC(VOLTAGE REGULATOR/ +5V)		
IC8			TA7815S	IC(VOLTAGE REGULATOR/ +15V)		
IC8			UPC7815AHF	IC(VOLTAGE REGULATOR/ +15V)		
IC9			TA79015S	IC(VOLTAGE REGULATOR/ -15V)		
IC9			UPC7915HF	IC(VOLTAGE REGULATOR/ -15V)		
Q1 ,2			2SC1845(F,E)	TRANSISTOR		
Q3 ,4			2SC2878(A,B)	TRANSISTOR		
Q5 ,6			2SC4137(V,W)	TRANSISTOR		
Q7 ,8			2SC1845(F,E)	TRANSISTOR		
Q9 ,10			2SD2254	TRANSISTOR		7
Q9 ,10			2SD2340	TRANSISTOR		5
Q11 ,12			2SB1492	TRANSISTOR		7
Q11 ,12			2SB1531	TRANSISTOR		5
Q31			2SC2003(L,K)	TRANSISTOR		
Q33			2SC2878(A,B)	TRANSISTOR		
Q34 -37			2SC2003(L,K)	TRANSISTOR		
Q38			2SA1175(F,E)	TRANSISTOR		
Q38			2SA933S(Q,R)	TRANSISTOR		
CONTROL UNIT (X11-330X-XX):A-57						
D8			B30-1291-05	LED(LN21CPSLX(V)-(TA4))		5
D13 -22			B30-1291-05	LED(LN21CPSLX(V)-(TA4))		
C1			CK45FF1H103Z	CERAMIC 0.010UF Z		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

※ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.9

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
C2			CE04KW1H010M	ELECTR⊙	1.0UF	50WV		J
C2			CE04LW1H010M	ELECTR⊙	1.0UF	50WV		S
C3			CE04KW1H220M	ELECTR⊙	22UF	50WV		J
C3			CE04LW1H220M	ELECTR⊙	22UF	50WV		S
C4 -7			CE04KW1H010M	ELECTR⊙	1.0UF	50WV		J
C4 -7			CE04LW1H010M	ELECTR⊙	1.0UF	50WV		S
C11			CE04KW0J471M	ELECTR⊙	470UF	6.3WV		J
C11			CE04LW0J471M	ELECTR⊙	470UF	6.3WV		S
C12			CE04HW1E100M	NP-ELEC	10UF	25WV		J
C12			CE04HW1E100M	NP-ELEC	10UF	25WV		S
C13			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C14			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C14		*	CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C15			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C16			CE04KW1V100M	ELECTR⊙	10UF	35WV		J
C16			CE04LW1V100M	ELECTR⊙	10UF	35WV		S
C17 ,18			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C17 ,18		*	CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C23 ,24			CF92FV1H473J	MF	0.047UF	J		
C25 -28			CE04KW1V100M	ELECTR⊙	10UF	35WV		J
C25 -28			CE04LW1V100M	ELECTR⊙	10UF	35WV		S
C31 ,32			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C31 ,32		*	CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C33 ,34			C90-3241-05	ELECTR⊙	3.3UF	35WV		J
C33 ,34			C90-3241-05	ELECTR⊙	3.3UF	35WV		S
C35 ,36			CC45FSL1H221J	CERAMIC	220PF	J		
C37 -40			CK45FB1H561K	CERAMIC	560PF	K		
C41 ,42			CF92FV1H683J	MF	0.068UF	J		
C43 ,44			C90-3244-05	ELECTR⊙	10UF	35WV		
C45 ,46			CF92FV1H103J	MF	0.010UF	J		
C47 ,48			C90-3232-05	ELECTR⊙	4.7UF	25WV		
C50			CK45FF1H103Z	CERAMIC	0.010UF	Z		
⚠ C51 ,52			C91-1439-05	FILM	0.01UF	250VAC	ETX	
⚠ C53 ,54			C91-1439-05	FILM	0.01UF	250VAC	M	
C55 ,56			CC45FSL1H221J	CERAMIC	220PF	J		
C57			CE04HW1E100M	NP-ELEC	10UF	25WV		
C58			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C61			CE04HW1E100M	NP-ELEC	10UF	25WV		
C63 ,64			CF92FV1H272J	MF	2700PF	J		
⚠ J5 ,6			E03-0108-05	AC OUTLET			E	
⚠ J5 ,6			E03-0109-05	AC OUTLET			I	
⚠ J8 ,9			E03-0108-05	AC OUTLET			M	
J10			E08-0312-05	RECTANGULAR RECEPTACLE				
J11			E08-0414-05	RECTANGULAR RECEPTACLE				
J12			E08-0411-05	RECTANGULAR RECEPTACLE				
J13			E08-0415-05	RECTANGULAR RECEPTACLE				
⚠ F6			F05-2525-05	FUSE (SEMK⊙)	(250V T2.5A)		ETX	
⚠ F7			F05-1222-05	FUSE (SEMK⊙)	(250V T1.25A)		ETX	
⚠ F9			F05-2525-05	FUSE (SEMK⊙)	(250V T2.5A)		M	
⚠ F10 ,11			F05-1222-05	FUSE (SEMK⊙)	(250V T1.25A)		M	
⚠ F12			F06-1022-05	FUSE (SEMK⊙)	(250V T1AL)			
⚠ F13			F05-2525-05	FUSE (SEMK⊙)	(250V T2.5A)			
-			J11-0098-05	WIRE CLAMPER				

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

※ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.10

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
CN10-15			J13-0075-05	FUSE CLIP	ETX	
CN14-23			J13-0075-05	FUSE CLIP	M	
CN22,23			J13-0075-05	FUSE CLIP	ETX	
J1 ,2			J21-5159-04	MOUNTING HARDWARE	ETX	
J3 ,4			J21-5159-04	MOUNTING HARDWARE	M	
X1			L78-0267-05	RESONATOR (4.194MHZ)		
CP1			R90-0493-05	MULTI-COMP 100KX9 J 1/6W		
R48			RS14KB3A222J	FL-PROOF RS 2.2K J 1W		
R61			RD14NB2E100J	RD 10 J 1/4W		
R62 ,63			RD14NB2E101J	RD 100 J 1/4W		
R81 ,82			RD14NB2E101J	RD 100 J 1/4W		
VR1			R29-5072-15	VARIABLE RESISTRO(100K) VOLUME		
VR2			R01-5086-05	POTENTIOMETER(200K) BALANCE		
VR3 ,4			R10-5058-05	POTENTIOMETER(100K)BASS,TREBLE		
⚠ K1			S76-0002-05	MAGNETIC RELAY	ETX	
⚠ K2			S76-0002-05	MAGNETIC RELAY	M	
S2 -5			S40-1064-05	PUSH SWITCH POWER,NB,DIR,REC		
S6 ,7			S40-2366-05	PUSH SWITCH SP ON/OFF,A/B		
⚠ S8			S62-0001-05	SLIDE SWITCH VOLTAGE SELECTOR	M	
⚠ S9			S31-2322-05	SLIDE SWITCH VOLTAGE SELECTOR	M	
			T99-0509-05	SPEED DETECTOR INPUT SELECTOR		
D2 -7			HSS104	DIODE		
D2 -7			1SS133	DIODE		
D9			HZS5.1N(B2)	ZENER DIODE		
D9			RD5.1ES(B2)	ZENER DIODE		
D10			HSS104A	DIODE		
D10			1SS131	DIODE		
D11			HZS4.7N(B2)	ZENER DIODE		
D11			RD4.7ES(B2)	ZENER DIODE		
D12			HSS104	DIODE		
D12			1SS133	DIODE		
D23			HSS104A	DIODE	ETX	
D23			1SS131	DIODE	ETX	
D24			HSS104A	DIODE	M	
D24			1SS131	DIODE	M	
D25			HSS104	DIODE		
D25			1SS133	DIODE		
IC1			UPD75004CU-147	IC(MICROPROCESSOR)		
IC2			PST529D	IC(SYSTEM RESET)		
IC3 ,4			NJM4565L-D	IC(OP AMP X2)		
IC5			TA8409S	IC(MOTOR CONTROL)		
Q1 ,2			2SC1740S(Q,R)	TRANSISTOR		
Q1 ,2			2SC2458(Y,GR)	TRANSISTOR		
Q1 ,2			2SC2785(F,E)	TRANSISTOR		
Q1 ,2			2SC3311A(Q,R)	TRANSISTOR		
Q3			2SA1048(Y,GR)	TRANSISTOR		
Q3			2SA1175(F,E)	TRANSISTOR		
Q3			2SA1309A(Q,R)	TRANSISTOR		
Q3			2SA933S(Q,R)	TRANSISTOR		
Q5 ,6			2SC1845(F,E)	TRANSISTOR		
Q7			2SA1048(Y,GR)	TRANSISTOR		
Q7			2SA1175(F,E)	TRANSISTOR		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

※ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.11

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
Q7			2SA1309A(Q,R)	TRANSISTOR				J
Q7			2SA933S(Q,R)	TRANSISTOR				S
Q9 ,10			2SC2878(A,B)	TRANSISTOR				
A1			W02-1046-05	ELECTRIC CIRCUIT MODULE				
CONTROL UNIT (X11-332X-XX):A-77								
D8			B30-1291-05	LED(LN21CPSLX(V)-(TA4))				
C1			C91-0769-05	CERAMIC	0.01UF	K		
C2			C90-3253-05	ELECTR⊙	1UF	50WV		
C3			CE04KW1H220M	ELECTR⊙	22UF	50WV		J
C3			CE04LW1H220M	ELECTR⊙	22UF	50WV		S
C4 -7			CE04KW1H010M	ELECTR⊙	1.0UF	50WV		J
C4 -7			CE04LW1H010M	ELECTR⊙	1.0UF	50WV		S
C8			C90-3225-05	ELECTR⊙	10UF	16WV		
C9			CE04KW1H4R7M	ELECTR⊙	4.7UF	50WV		J
C9			CE04LW1H4R7M	ELECTR⊙	4.7UF	50WV		S
C10			C90-3256-05	ELECTR⊙	4.7UF	50WV		
C11			CE04KW0J471M	ELECTR⊙	470UF	6.3WV		J
C11			CE04LW0J471M	ELECTR⊙	470UF	6.3WV		S
C12			CE04HW1E100M	NP-ELEC	10UF	25WV		
C13			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C14			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C14			CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C15			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C16			CE04KW1V100M	ELECTR⊙	10UF	35WV		J
C16			CE04LW1V100M	ELECTR⊙	10UF	35WV		S
C17 ,18			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C17 ,18			CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C19			CE04KW1H331M	ELECTR⊙	330UF	50WV		J
C19			CE04LW1H331M	ELECTR⊙	330UF	50WV		S
C20			CE04KW1H100M	ELECTR⊙	10UF	50WV		J
C20			CE04LW1H100M	ELECTR⊙	10UF	50WV		S
C23 ,24			CF92FV1H473J	MF	0.047UF	J		
C25 -28			CE04KW1V100M	ELECTR⊙	10UF	35WV		J
C25 -28			CE04LW1V100M	ELECTR⊙	10UF	35WV		S
C31 ,32			CE04KW1E470M	ELECTR⊙	47UF	25WV		J
C31 ,32			CE04LW1E470M	ELECTR⊙	47UF	25WV		S
C33 ,34			C90-3241-05	ELECTR⊙	3.3UF	35WV		
C35 ,36			CC45FSL1H221J	CERAMIC	220PF	J		
C37 -40			CK45FB1H561K	CERAMIC	560PF	K		
C41 ,42			CF92FV1H683J	MF	0.068UF	J		
C43 ,44			C90-3244-05	ELECTR⊙	10UF	35WV		
C45 ,46			CF92FV1H103J	MF	0.010UF	J		
C47 ,48			C90-3232-05	ELECTR⊙	4.7UF	25WV		
C50			CK45FF1H103Z	CERAMIC	0.010UF	Z		
⚠ C51 ,52			C91-1439-05	FILM	0.01UF	250VAC	ETX	
⚠ C53 ,54			C91-1439-05	FILM	0.01UF	250VAC	M	
C55 ,56			CC45FSL1H221J	CERAMIC	220PF	J		
C57			CE04HW1E100M	NP-ELEC	10UF	25WV		
C58			CK45FF1H103Z	CERAMIC	0.010UF	Z		
C61			CE04HW1E100M	NP-ELEC	10UF	25WV		
C63 ,64			CF92FV1H272J	MF	2700PF	J		
⚠ J5 ,6			E03-0108-05	AC OUTLET			E	
⚠ J5 ,6			E03-0109-05	AC OUTLET			I	

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

※ New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.12

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
⚠ J8 ,9			E03-0108-05	AC OUTLET	M	
J10			E08-0312-05	RECTANGULAR RECEPTACLE SYNCHRO		
J11			E08-0414-05	RECTANGULAR RECEPTACLE TUNER		
J12			E08-0411-05	RECTANGULAR RECEPTACLE DECK		
J13			E08-0415-05	RECTANGULAR RECEPTACLE CD		
⚠ F6			F05-2525-05	FUSE (SEMK⊙) (250V T2.5A)	ETX	
⚠ F7			F06-2021-05	FUSE (SEMK⊙) (250V T2A)	ETX	
⚠ F9			F05-2525-05	FUSE (SEMK⊙) (250V T2.5A)	M	
⚠ F10 ,11			F06-2021-05	FUSE (SEMK⊙) (250V T2A)	M	
⚠ F12			F06-1022-05	FUSE (SEMK⊙) (250V T1AL)		
⚠ F13			F05-2525-05	FUSE (SEMK⊙) (250V T2.5A)		
-			J11-0098-05	WIRE CLAMPER		S
-			J11-0098-05	WIRE CLAMPER		
CN10-15			J13-0075-05	FUSE CLIP	ETX	
CN14-23			J13-0075-05	FUSE CLIP	M	
CN22,23			J13-0075-05	FUSE CLIP	ETX	
X1			L78-0267-05	RESONATOR 4.194MHz		
CP1			R90-0850-05	MULTI-COMP 100KX3 J 1/6W		
CP2			R90-0855-05	MULTI-COMP 100KX5 J		
R44			RD14NB2E472J	RD 4.7K J 1/4W		
R46 ,47			RD14NB2E470J	RD 47 J 1/4W		
R48			RS14KB3A472J	FL-PROOF RS 4.7K J 1W		
R55 ,56			RD14NB2E2R2J	RD 2.2 J 1/4W		
R58			RD14NB2E331J	RD 330 J 1/4W		
R61			RD14NB2E100J	RD 10 J 1/4W		
R62 ,63			RD14NB2E101J	RD 100 J 1/4W		
R66			RS14KB3A472J	FL-PROOF RS 4.7K J 1W		
R81 ,82			RD14NB2E101J	RD 100 J 1/4W		
VR1			R29-5072-15	VARIABLE RESISTRO(100K) VOLUME		
VR2			R01-5086-05	POTENTIOMETER(200K) BALANCE		
VR3 ,4			R10-5058-05	POTENTIOMETER(100K)BASS,TREBLE		
⚠ K1			S76-0002-05	MAGNETIC RELAY	ETX	
⚠ K2			S76-0002-05	MAGNETIC RELAY	M	
S2 -5			S40-1064-05	PUSH SWITCH POWER,NB,DIR,REC		
S6 ,7			S40-2366-05	PUSH SWITCH SP ON/OFF,A/B		
⚠ S8			S62-0001-05	SLIDE SWITCH VOLTAGE SELECTOR	M	
⚠ S9			S31-2322-05	SLIDE SWITCH VOLTAGE SELECTOR	M	
S1			T99-0509-05	SPEED DETECTOR INPUT SELECTOR		
D1 -7			HSS104	DIODE		
D1 -7			1SS133	DIODE		
D9			HZS5.1N(B2)	ZENER DIODE		
D9			RD5.1ES(B2)	ZENER DIODE		
D10			HSS104A	DIODE		
D10			1SS131	DIODE		
D11			HZS4.7N(B2)	ZENER DIODE		
D11			RD4.7ES(B2)	ZENER DIODE		
D12			HSS104	DIODE		
D12			1SS133	DIODE		
D13			S5688B	DIODE		
D14			HSS104A	DIODE		
D14			1SS131	DIODE		
D15			HZS5.1N(B2)	ZENER DIODE		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.13

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格			Destination 仕向	Remarks 備考
D15			RD5.1ES(B2)	ZENER DIODE				
D16			HZS4.7N(B2)	ZENER DIODE				
D16			RD4.7ES(B2)	ZENER DIODE				
D17			HZS16N(B2)	ZENER DIODE				
D17			RD16ES(B2)	ZENER DIODE				
D18			HZS13N(B2)	ZENER DIODE				
D18			RD13ES(B2)	ZENER DIODE				
D23			HSS104A	DIODE			ETX	
D23			1SS131	DIODE			ETX	
D24			HSS104A	DIODE			M	
D24			1SS131	DIODE			M	
D25			HSS104	DIODE				
D25			1SS133	DIODE				
ED1			CM1154C	INDICATOR TUBE				
IC1			UPD75268CW-044	IC(4BIT MICROPROCESSOR)				
IC2			PST529D	IC(SYSTEM RESET)				
IC3 ,4			NJM4565L-D	IC(OP AMP X2)				
IC5			TA8409S	IC(MOTOR CONTROL)				
Q1			2SA954(L,K)	TRANSISTOR				
Q3			2SA1048(Y,GR)	TRANSISTOR				J
Q3			2SA1175(F,E)	TRANSISTOR				S
Q3			2SA1309A(Q,R)	TRANSISTOR				J
Q3			2SA933S(Q,R)	TRANSISTOR				S
Q5 ,6			2SC1845(F,E)	TRANSISTOR				
Q7			2SA1048(Y,GR)	TRANSISTOR				J
Q7			2SA1175(F,E)	TRANSISTOR				S
Q7			2SA1309A(Q,R)	TRANSISTOR				J
Q7			2SA933S(Q,R)	TRANSISTOR				S
Q9 ,10			2SC2878(A,B)	TRANSISTOR				
A1			W02-1046-05	ELECTRIC CIRCUIT MODULE				
MAIN AMPLIFIER UNIT (X85-122X-XX)								
C1 ,2			CE04KW1H010M	ELECTRO	1.0UF	50WV		J
C1 ,2			CE04LW1H010M	ELECTRO	1.0UF	50WV		S
C3 ,4			CK45FB1H471K	CERAMIC	470PF	K		
C5 ,6			C90-1844-05	ELECTRO	47UF	6.3WV		
C7 ,8			CC45FSL1H121J	CERAMIC	120PF	J		
C9 ,10			CC45FSL1H020C	CERAMIC	2.0PF	C		
C11 ,12			CC45FSL1H221J	CERAMIC	220PF	J		
C13 ,14			CC45FSL1H390J	CERAMIC	39PF	J		
C15 ,16			CC45FSL1H221J	CERAMIC	220PF	J		
C17 ,18			CE04KW1H470M	ELECTRO	47UF	50WV		J
C17 ,18			CE04LW1H470M	ELECTRO	47UF	50WV		S
C19			CE04HW1A470M	NP-ELEC	47UF	10WV		
C20			CE04KW1V4R7M	ELECTRO	4.7UF	35WV		J
C20			CE04LW1V4R7M	ELECTRO	4.7UF	35WV		S
R5 ,6			RN14BK2C2151F	RN	2.15K	F 1/6W	ET	7
R5 ,6			RN14BK2C2371F	RN	2.37K	F 1/6W	MX	7
R5 ,6			RN14BK2C2611F	RN	2.61K	F 1/6W	ET	5
R5 ,6			RN14BK2C2871F	RN	2.87K	F 1/6W	MX	5
R15 ,16			RD14GB2E271J	FL-PROOF RD	270	J 1/4W		
R21 -24			RD14GB2E221J	FL-PROOF RD	220	J 1/4W		
R25 ,26			RD14GB2E470J	FL-PROOF RD	47	J 1/4W		
D1 ,2			HSS104	DIODE				

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

* New Parts
Parts without Parts No. are not supplied.
Les articles non mentionnes dans le Parts No. ne sont pas fournis.
Teile ohne Parts No. werden nicht geliefert.

NO.14

Ref. No. 参照番号	Address 位置	New Parts 新	Parts No. 部品番号	Description 部品名／規格	Destination 仕向	Remarks 備考
D1 ,2			1SS133	DIODE		
D3			HSS104A	DIODE		
D3			1SS131	DIODE		
Q1 -4			2SA992(F,E)	TRANSISTOR		
Q5 -8			2SC1845(F,E)	TRANSISTOR		
Q9 ,10			2SA992(F,E)	TRANSISTOR		
Q11			2SC1740S(Q,R)	TRANSISTOR		S
Q11			2SC2458(Y,GR)	TRANSISTOR		J
Q11			2SC2785(F,E)	TRANSISTOR		S
Q11			2SC3311A(Q,R)	TRANSISTOR		J
Q12			DTC124ES	DIGITAL TRANSISTOR		
Q12			UN4212	TRANSISTOR		

L:Scandinavia K:USA P:Canada
Y:PX(Far East, Hawaii) T:England E:Europe
Y:AAFES(Europe) X:Australia M:Other Areas

J : JAPAN MADE
S : SINGAPORE MADE
5 : A-57
7 : A-77

⚠ indicates safety critical components.

A-57/77

SPECIFICATIONS

A-57

Rated power output
(IEC/NF) from 63Hz to 12,500 Hz, 0.7% T.H.D., at 8Ω ..... 45W + 45W
(DIN) 1,000Hz at 8Ω ..... 45W + 45W

Total harmonic distortion (1kHz, 8Ω) .....0.02% at 20W
Signal to noise ratio (IHF-A)
PHONO (MM) .....73dB for 2.5mV input
CD, TAPE .....97dB for 200mV input
Input sensitivity/impedance
PHONO (MM) 2.5 mV/47kΩ
CD, TAPE 200mV/47kΩ
Tone controls
BASS .....±10dB (at 100Hz)
TREBLE .....±10dB (at 10kHz)

General
Power consumption..... 140W
Dimensions .....**W** : 360mm
H : 119mm
D : 383mm
Weight (net) 6.7kg
AC outlets (switched) .....2 (Total 200W max)

A-77

Rated power output
(IEC/NF) from 63 Hz to 12,500Hz, 0.7% T.H.D. at 8Ω ..... 60W + 60W
(DIN) 1,000Hz at 8Ω ..... 60W + 60W

Total harmonic distortion (1kHz, 8Ω) .....0.02% at 25W
Frequency response
CD ..... 20Hz~50kHz, +0dB, -3dB
Signal to noise ratio (IHF-A)
PHONO (MM) .....73dB for 2.5mV input
CD, TAPE .....97dB for 200mV input
Signal to noise ratio (DIN weighted at 50mW output)
PHONO (MM) 60dB
CD, TAPE 62dB
Input sensitivity/impedance
PHONO (MM) 2.5mV/47kΩ
CD, TAPE 200mV/47kΩ
Tone controls
BASS .....±10dB (at 100Hz)
TREBLE .....±10dB (at 10kHz)
General
Power consumption..... 160W
Dimensions .....**W** : 360 mm
H : 119 mm
D : 383 mm
Weight (net) 7.6kg
AC outlets (switched) .....2 (Total 200W max)

Kenwood follows a policy of continuous advancements in development.
For this reason specifications may be changed without notice.

Kenwood poursuit une politique de progrès constants en ce qui concerne le developpement.
Pour cette raison, les spécifications sont sujettes à modifications sans préavis.

Kenwood strebt ständige Verbesserungen in der Entwicklung an.
Daher bleiben Änderungen der technischen Daten jederzeit vorbehalten.

Note:

Component and circuitry are subject to modification to insure best operation under differing local conditions. This manual is based on the U.S.A. (K) standard, and provides information on regional circuit modification through use of alternate schematic diagrams, and information on regional component variations through use of parts list.

KENWOOD CORPORATION
Alive Mitake, 2-5, 1-chome Shibuya, Shibuya-ku, Tokyo 150, Japan
KENWOOD U.S.A. CORPORATION
P.O. BOX 22745, 2201 East Dominguez St., Long Beach, CA 90801-5745, U.S.A.
550 Clark Drive, Mount Olive, New Jersey 07828, U.S.A.
99-994 Iwaena St. Aiea, Hawaii 96701
KENWOOD ELECTRONICS CANADA INC.
6070 Kestrel Road, Mississauga, Ontario, Canada L5T 1S8
KENWOOD ELECTRONICS LATIN AMERICA S.A.
P.O. BOX 55-2791, Piso 6 Plaza Chase, Cl. 47 y Aquilino de la Guardia, Panama, Republic de Panama
TRIO-KENWOOD U.K. LIMITED
Kenwood House, Dwight Road, Watford, Herts, WD1 8EB, United Kingdom
KENWOOD ELECTRONICS BENELUX N.V.
Mechelsesteenweg 418 B-1930 Zaventem, Belgium
KENWOOD ELECTRONICS DEUTSCHLAND GMBH
Rembrücker Str. 15, 63150 Heusenstamm, Germany
TRIO-KENWOOD FRANCE S.A.
13 Boulevard Ney, 75018 Paris, France
KENWOOD LINEAR S.p.A.
20125, Milano-Via Arbe, 50, Italy
KENWOOD ESPAÑA S.A.
Bolivia, 239-08020 Barcelona, Spain
KENWOOD ELECTRONICS AUSTRALIA PTY. LTD. (A.C.N. 001 499 074)
P.O. BOX 504, 8 Figtree Drive, Australia Centre, Homebush, N.S.W. 2140, Australia
KENWOOD & LEE ELECTRONICS, LTD.
Unit 3712-3724, Level 37 Tower 1, Metroplaza, 223 Hing Fong Road, Kwai Fong N.T. Hong Kong
KENWOOD ELECTRONICS SINGAPORE PTE LTD
No. 1 Genting Lane #07-00, Singapore, 1334